

WhatsApp: +86 152 2133 1556

Email: contact@innovcool.com


Make Things Cool



CONTENT

W-18 Series	01-02
W-18	
W-25	
W-40 Series	03-04
W-40	
W-50	
W-60	
W-35 Series	05-06
W-35	
W-45	
W-55	
K-20 Series	07-10
K-20	
K-26	
K-30	
K-26S	
K-30L	
X-15 Series	11-12
X-15	
X-25	
Q-18 Series	13-14
Q-18	
Q-22	
Q-28	
Q-26 Series	15-16
Q-26	
Q-36	
Q-30 Series	17-20
Q-30	
Q-40	
Q-55	
Q-65	
HF-01 Series	21-22
HF-01	
HF-02	
G-55	23-24

COMPANY PROFILE

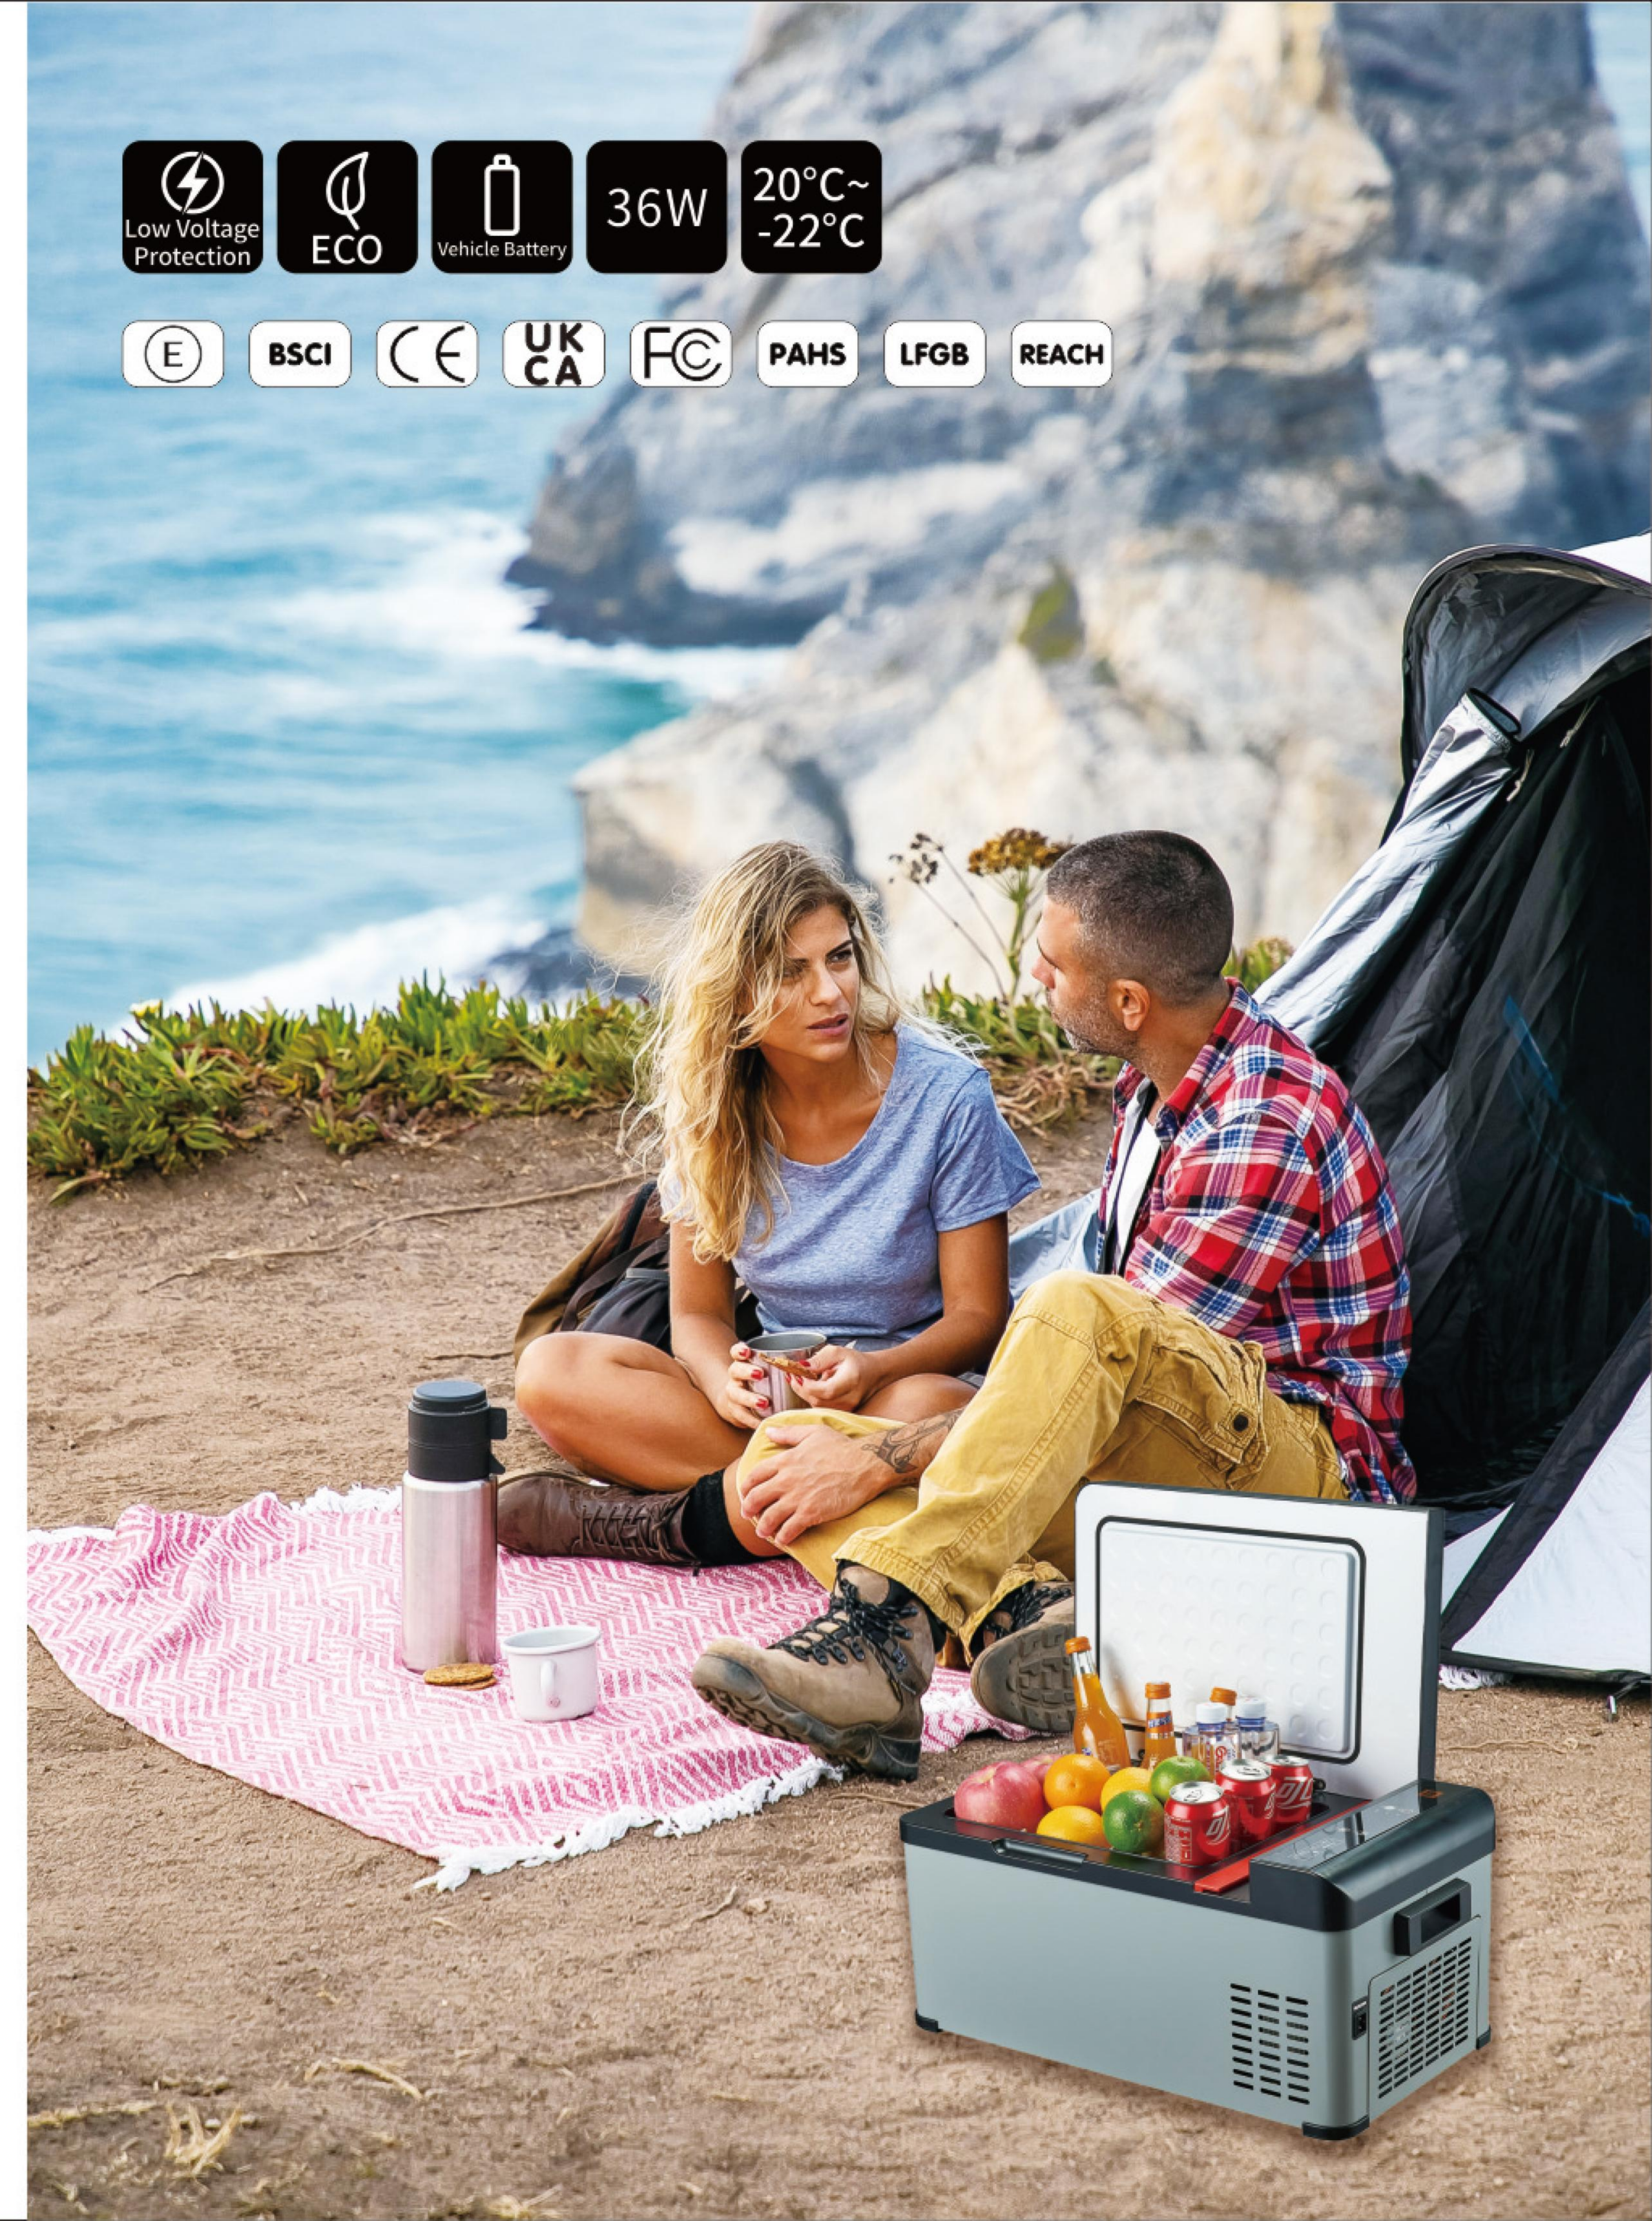



W-18

- Capacity:18L
- Average power consumption:55W
- N.W.:12.7KGS/G.W.:14.5KGS
- Dimensions:616*340*338mm
- Packing:648*416*430mm (1pc)
- FCL quantity:230/460/552



W-25


- Capacity:25L
- Average power consumption:55W
- N.W.:13.5KGS/G.W.:15.3KGS
- Dimensions:616*340*403mm
- Packing:648*416*495mm (1pc)
- FCL quantity:184/368/460





W-40

- Capacity:40L
- Average power consumption:48W
- N.W.:15.5KGS/G.W.:17.7KGS
- Dimensions:670*406*440mm
- Packing:700*490*504mm (1pc)
- FCL quantity:180/288/360

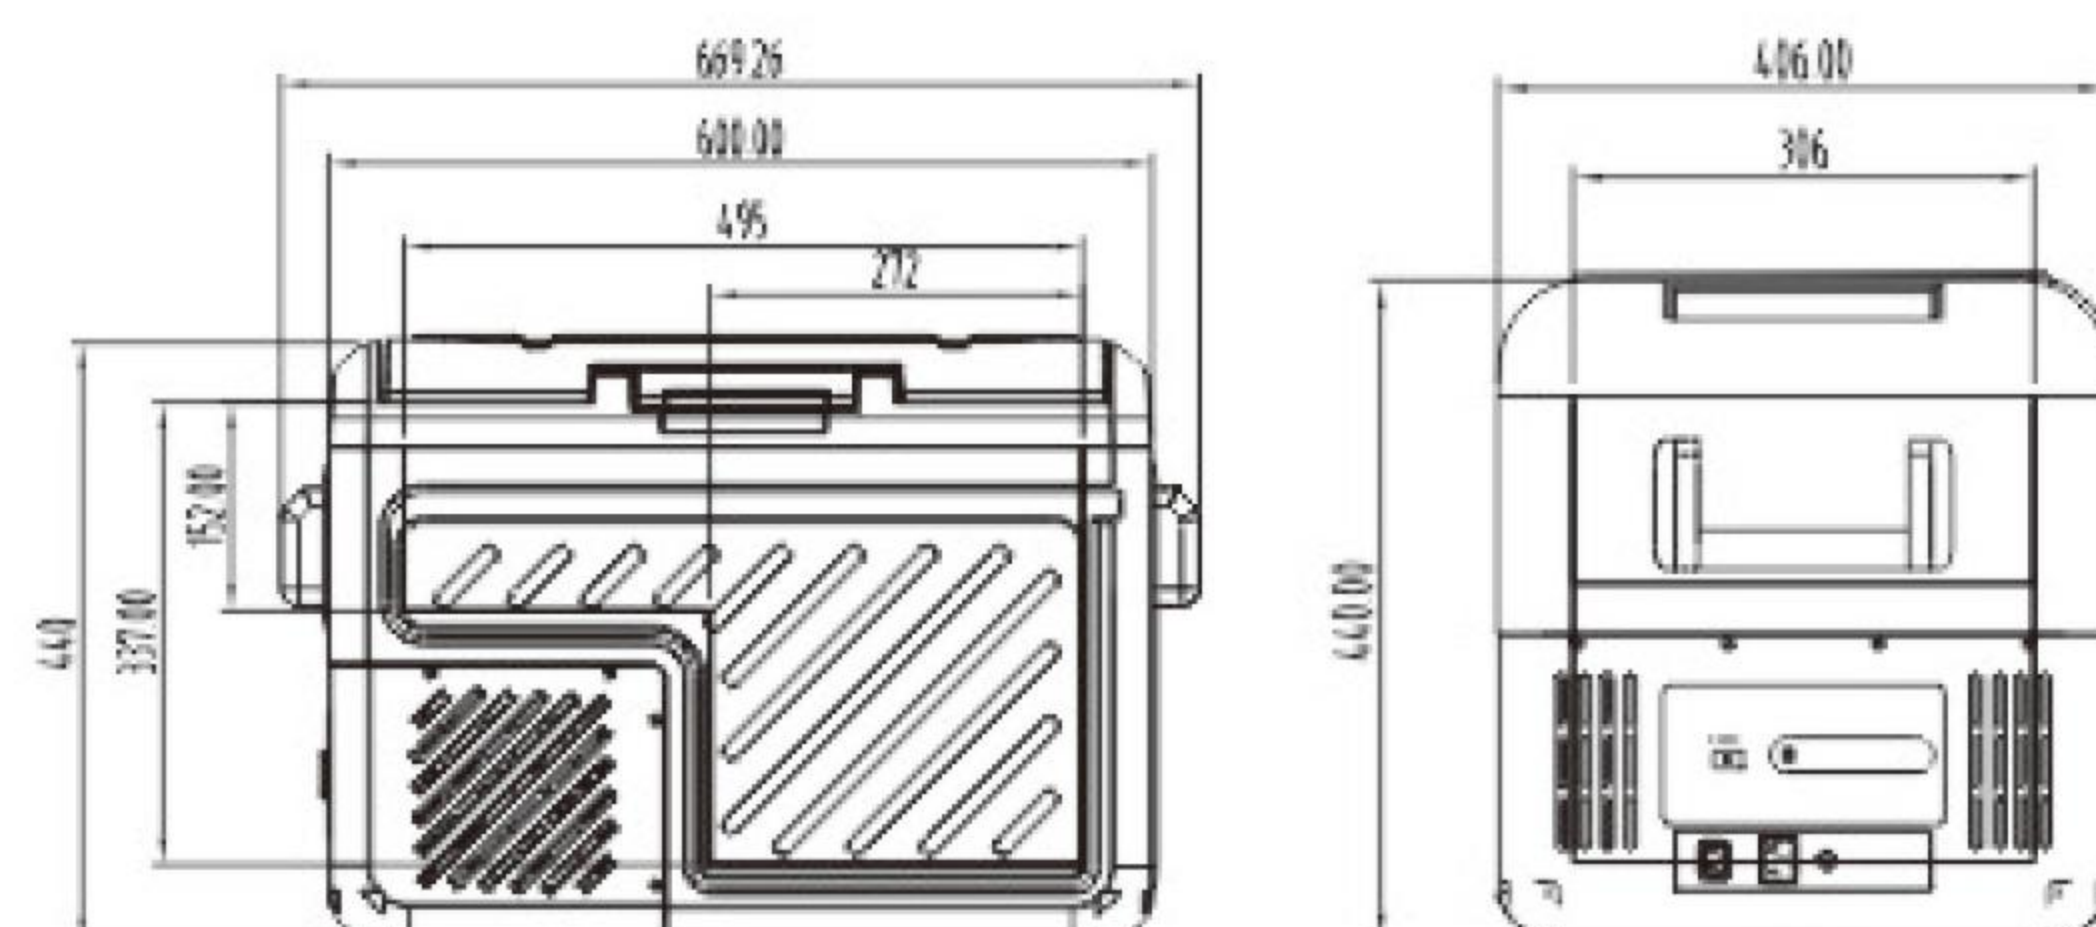


W-50

- Capacity:50L
- Average power consumption:50W
- N.W.:15.8KGS/G.W.:18.5KGS
- Dimensions:670*406*507mm
- Packing:700*490*567mm (1pc)
- FCL quantity:144/288/288



W-60


- Capacity:60L
- Average power consumption:50W
- N.W.:16.8KGS/G.W.:19.7KGS
- Dimensions:670*406*572mm
- Packing:700*490*632mm (1pc)
- FCL quantity:144/288/288

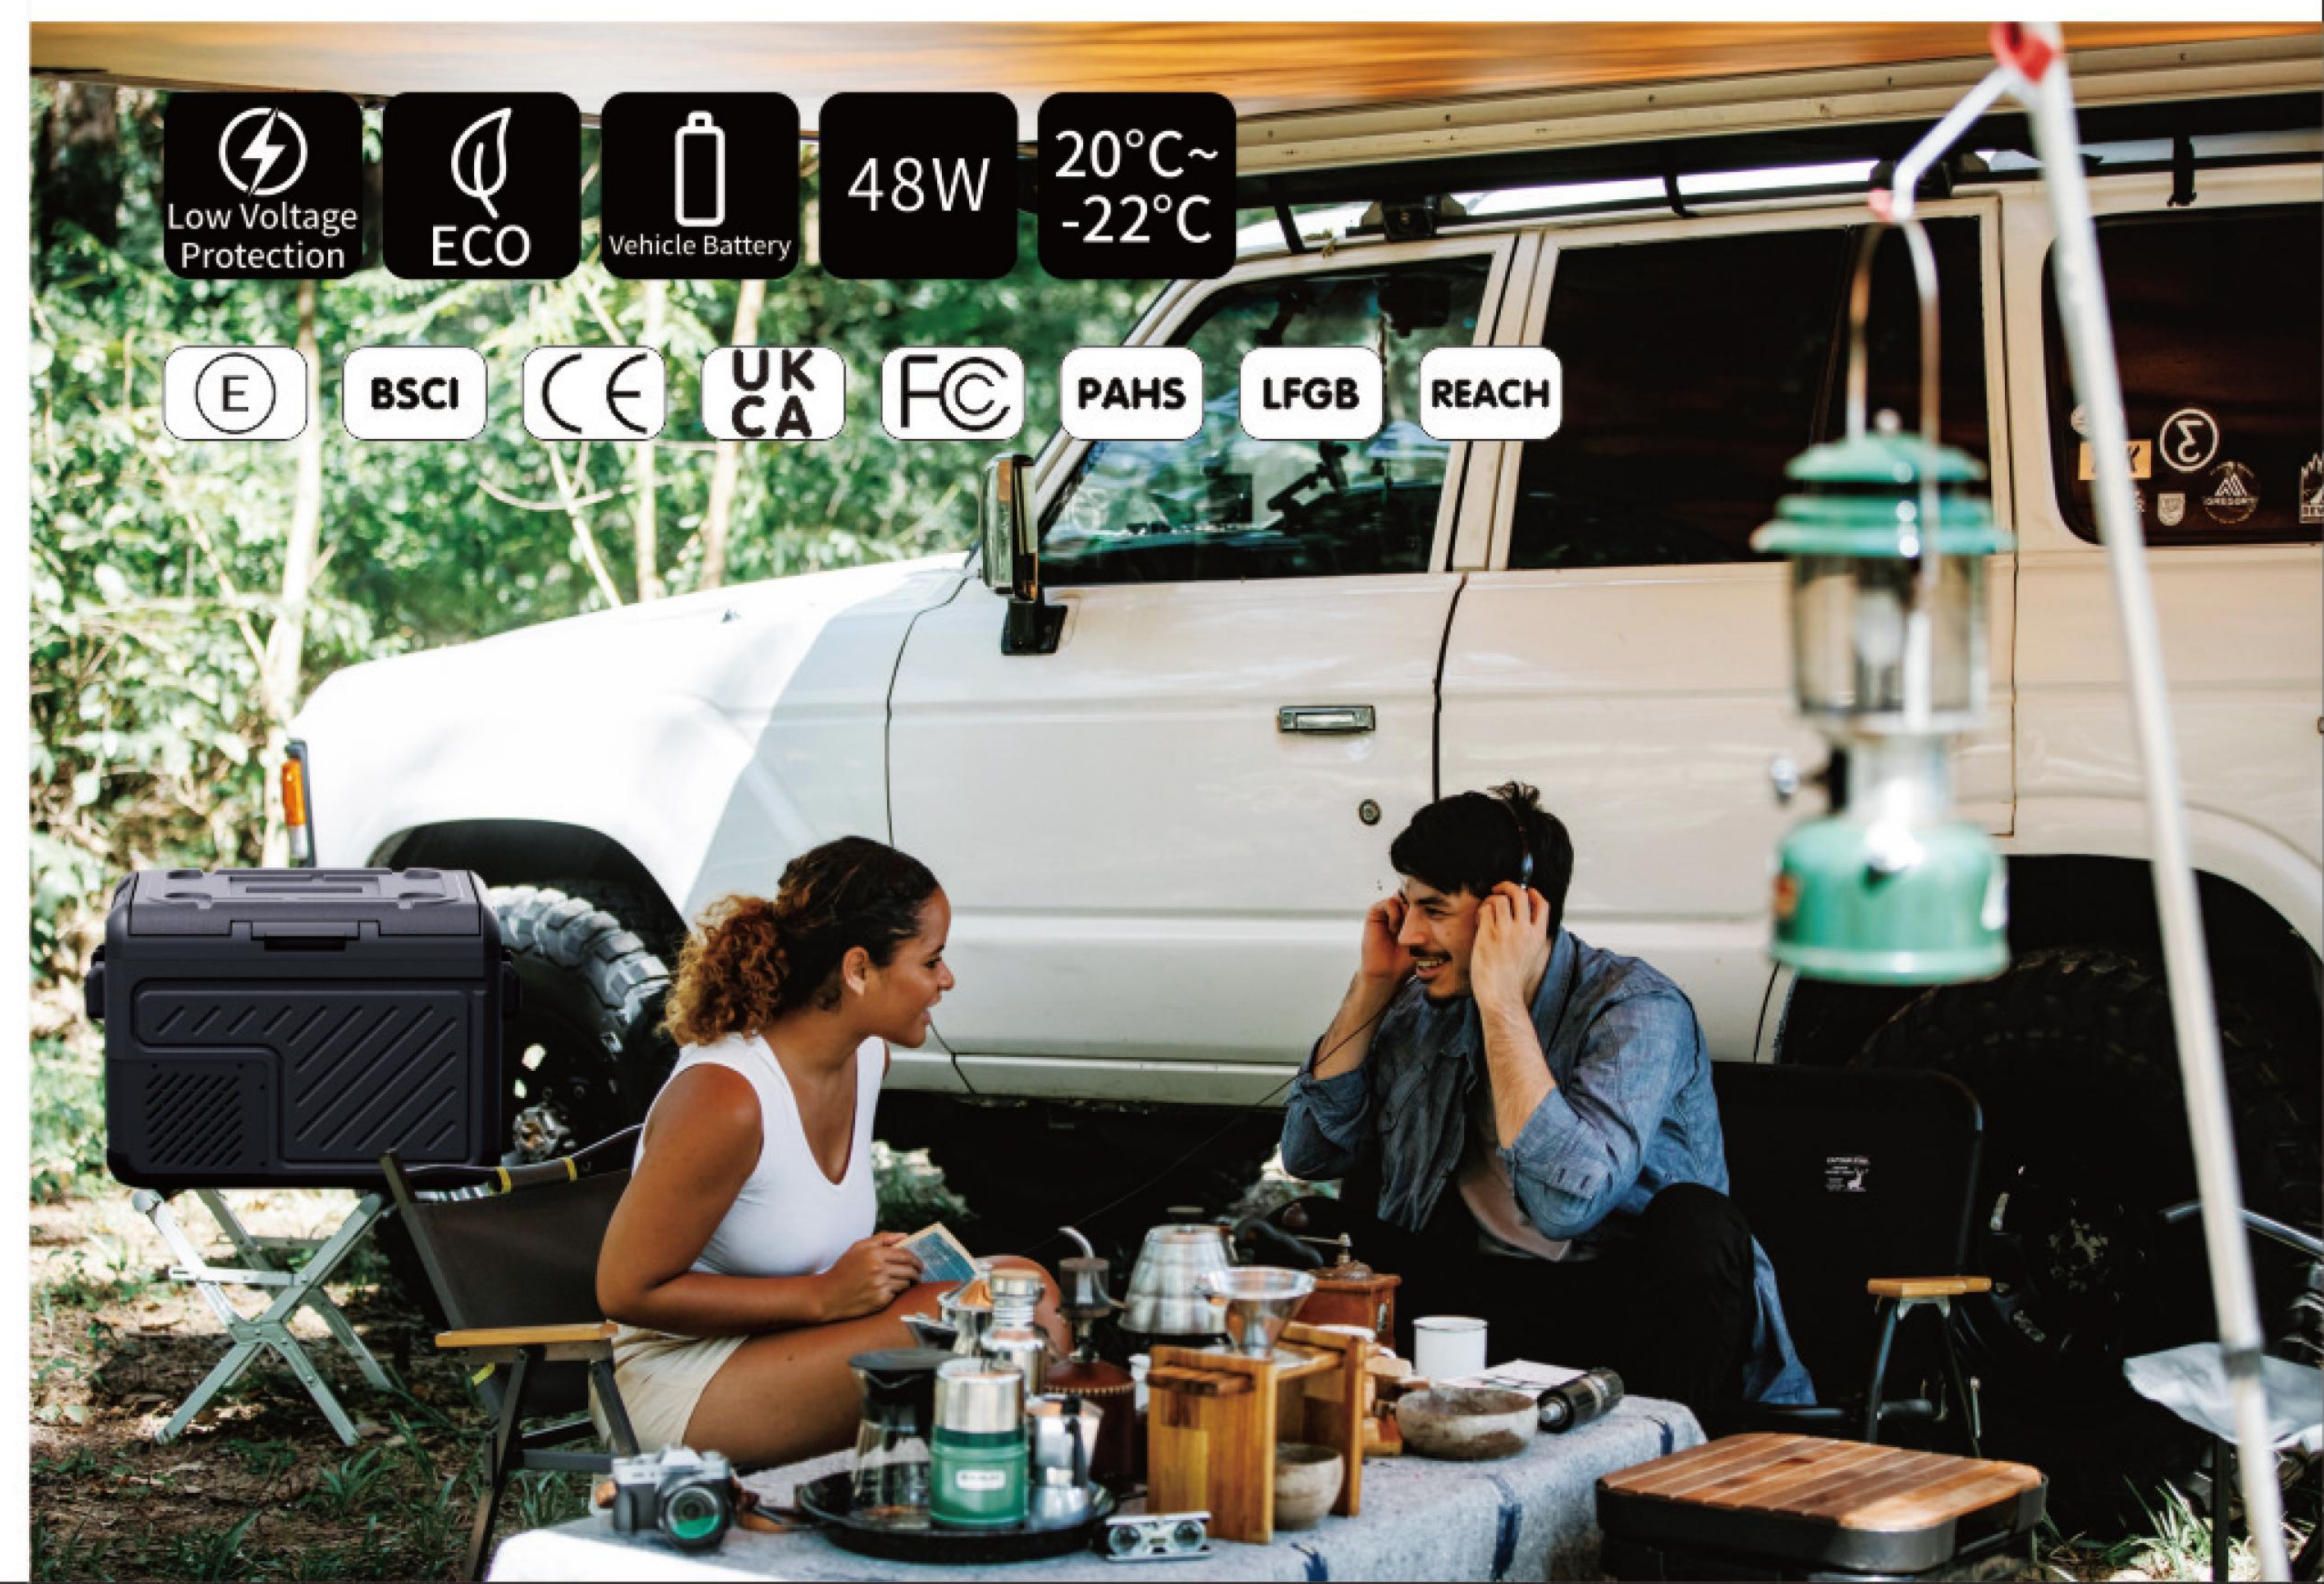



W-35 Dual zones

- Capacity:35L
- Average power consumption:55W
- N.W.:16.5KGS/G.W.:18.7KGS
- Dimensions:670*406*440mm
- Packing:700*490*504mm
- FCL quantity:144/288/360

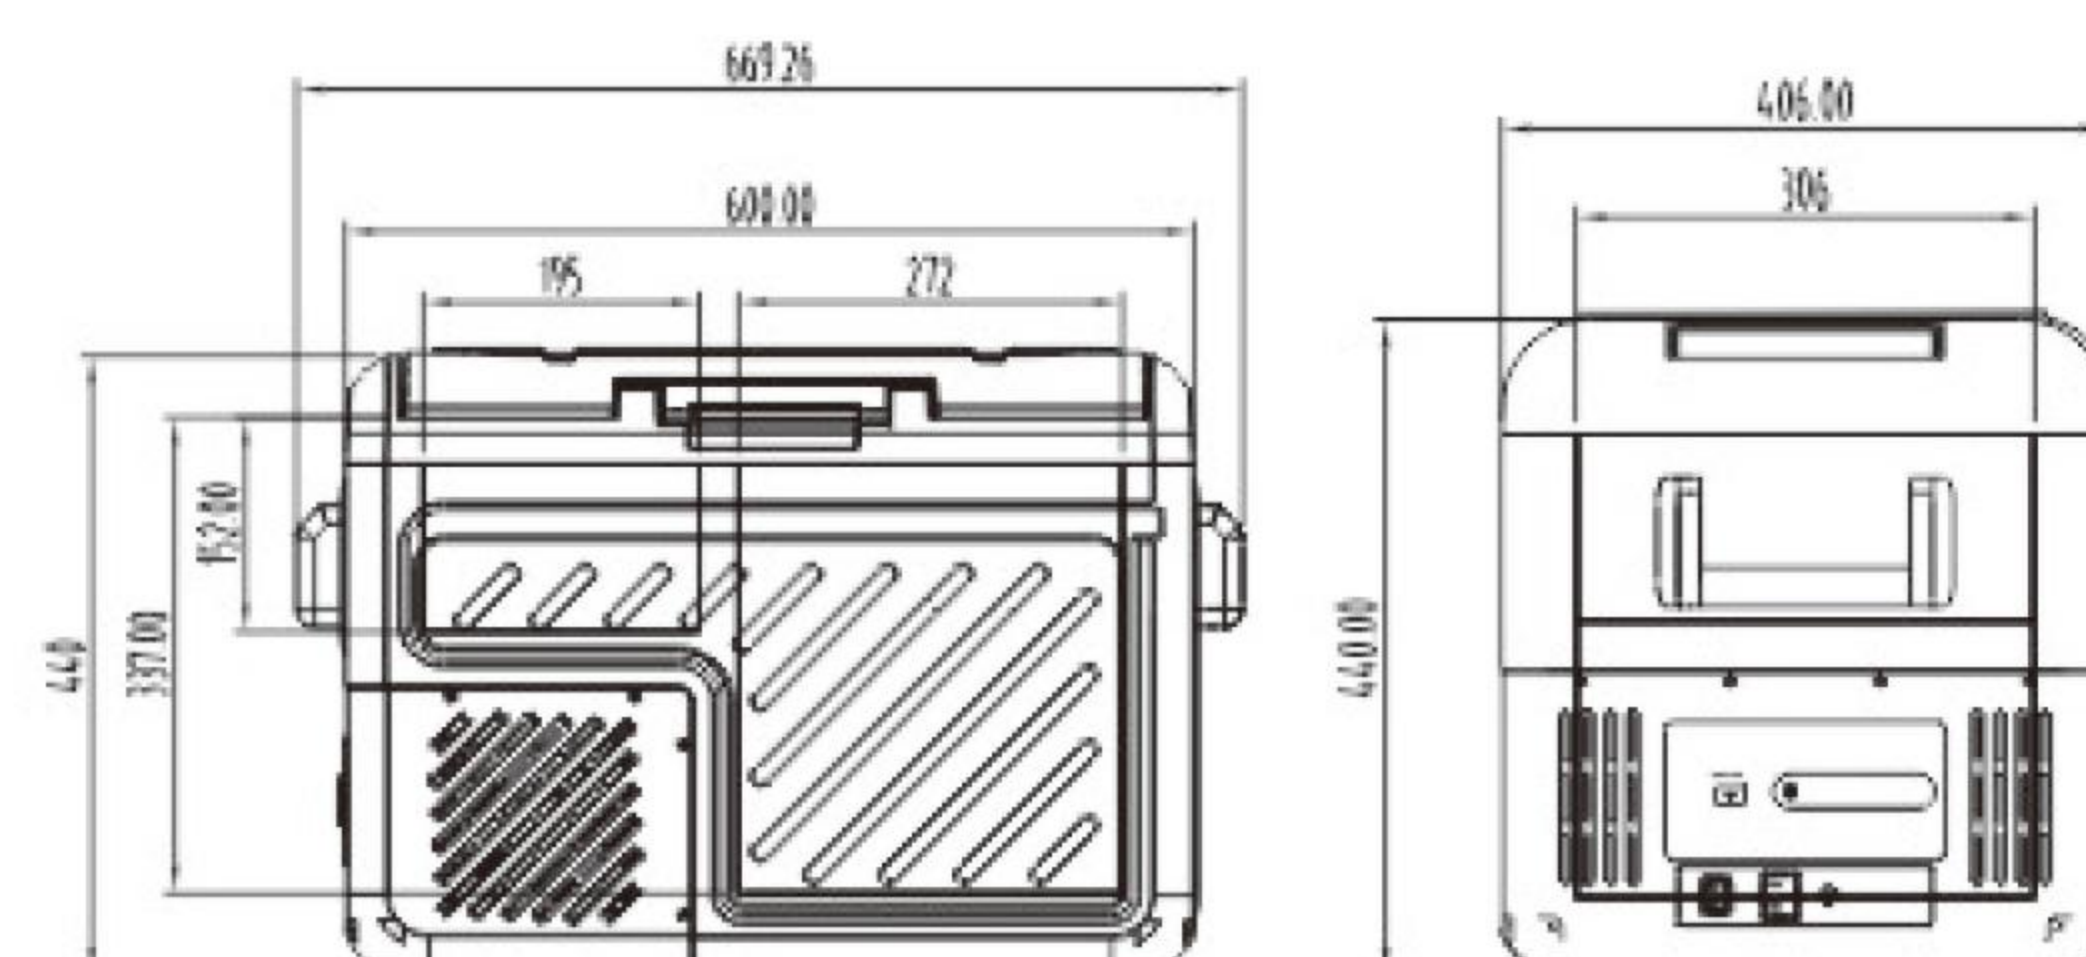





W-45 Dual zones

- Capacity:45L
- Average power consumption:60W
- N.W.:16.8KGS/G.W.:19.5KGS
- Dimensions:670*406*507mm
- Packing:700*490*567mm (1pc)
- FCL quantity:144/288/288



W-55 Dual zones

- Capacity:55L
- Average power consumption:60W
- N.W.:17.8KGS/G.W.:20.7KGS
- Dimensions:670*406*572mm
- Packing:700*490*632mm (1pc)
- FCL quantity:144/288/288

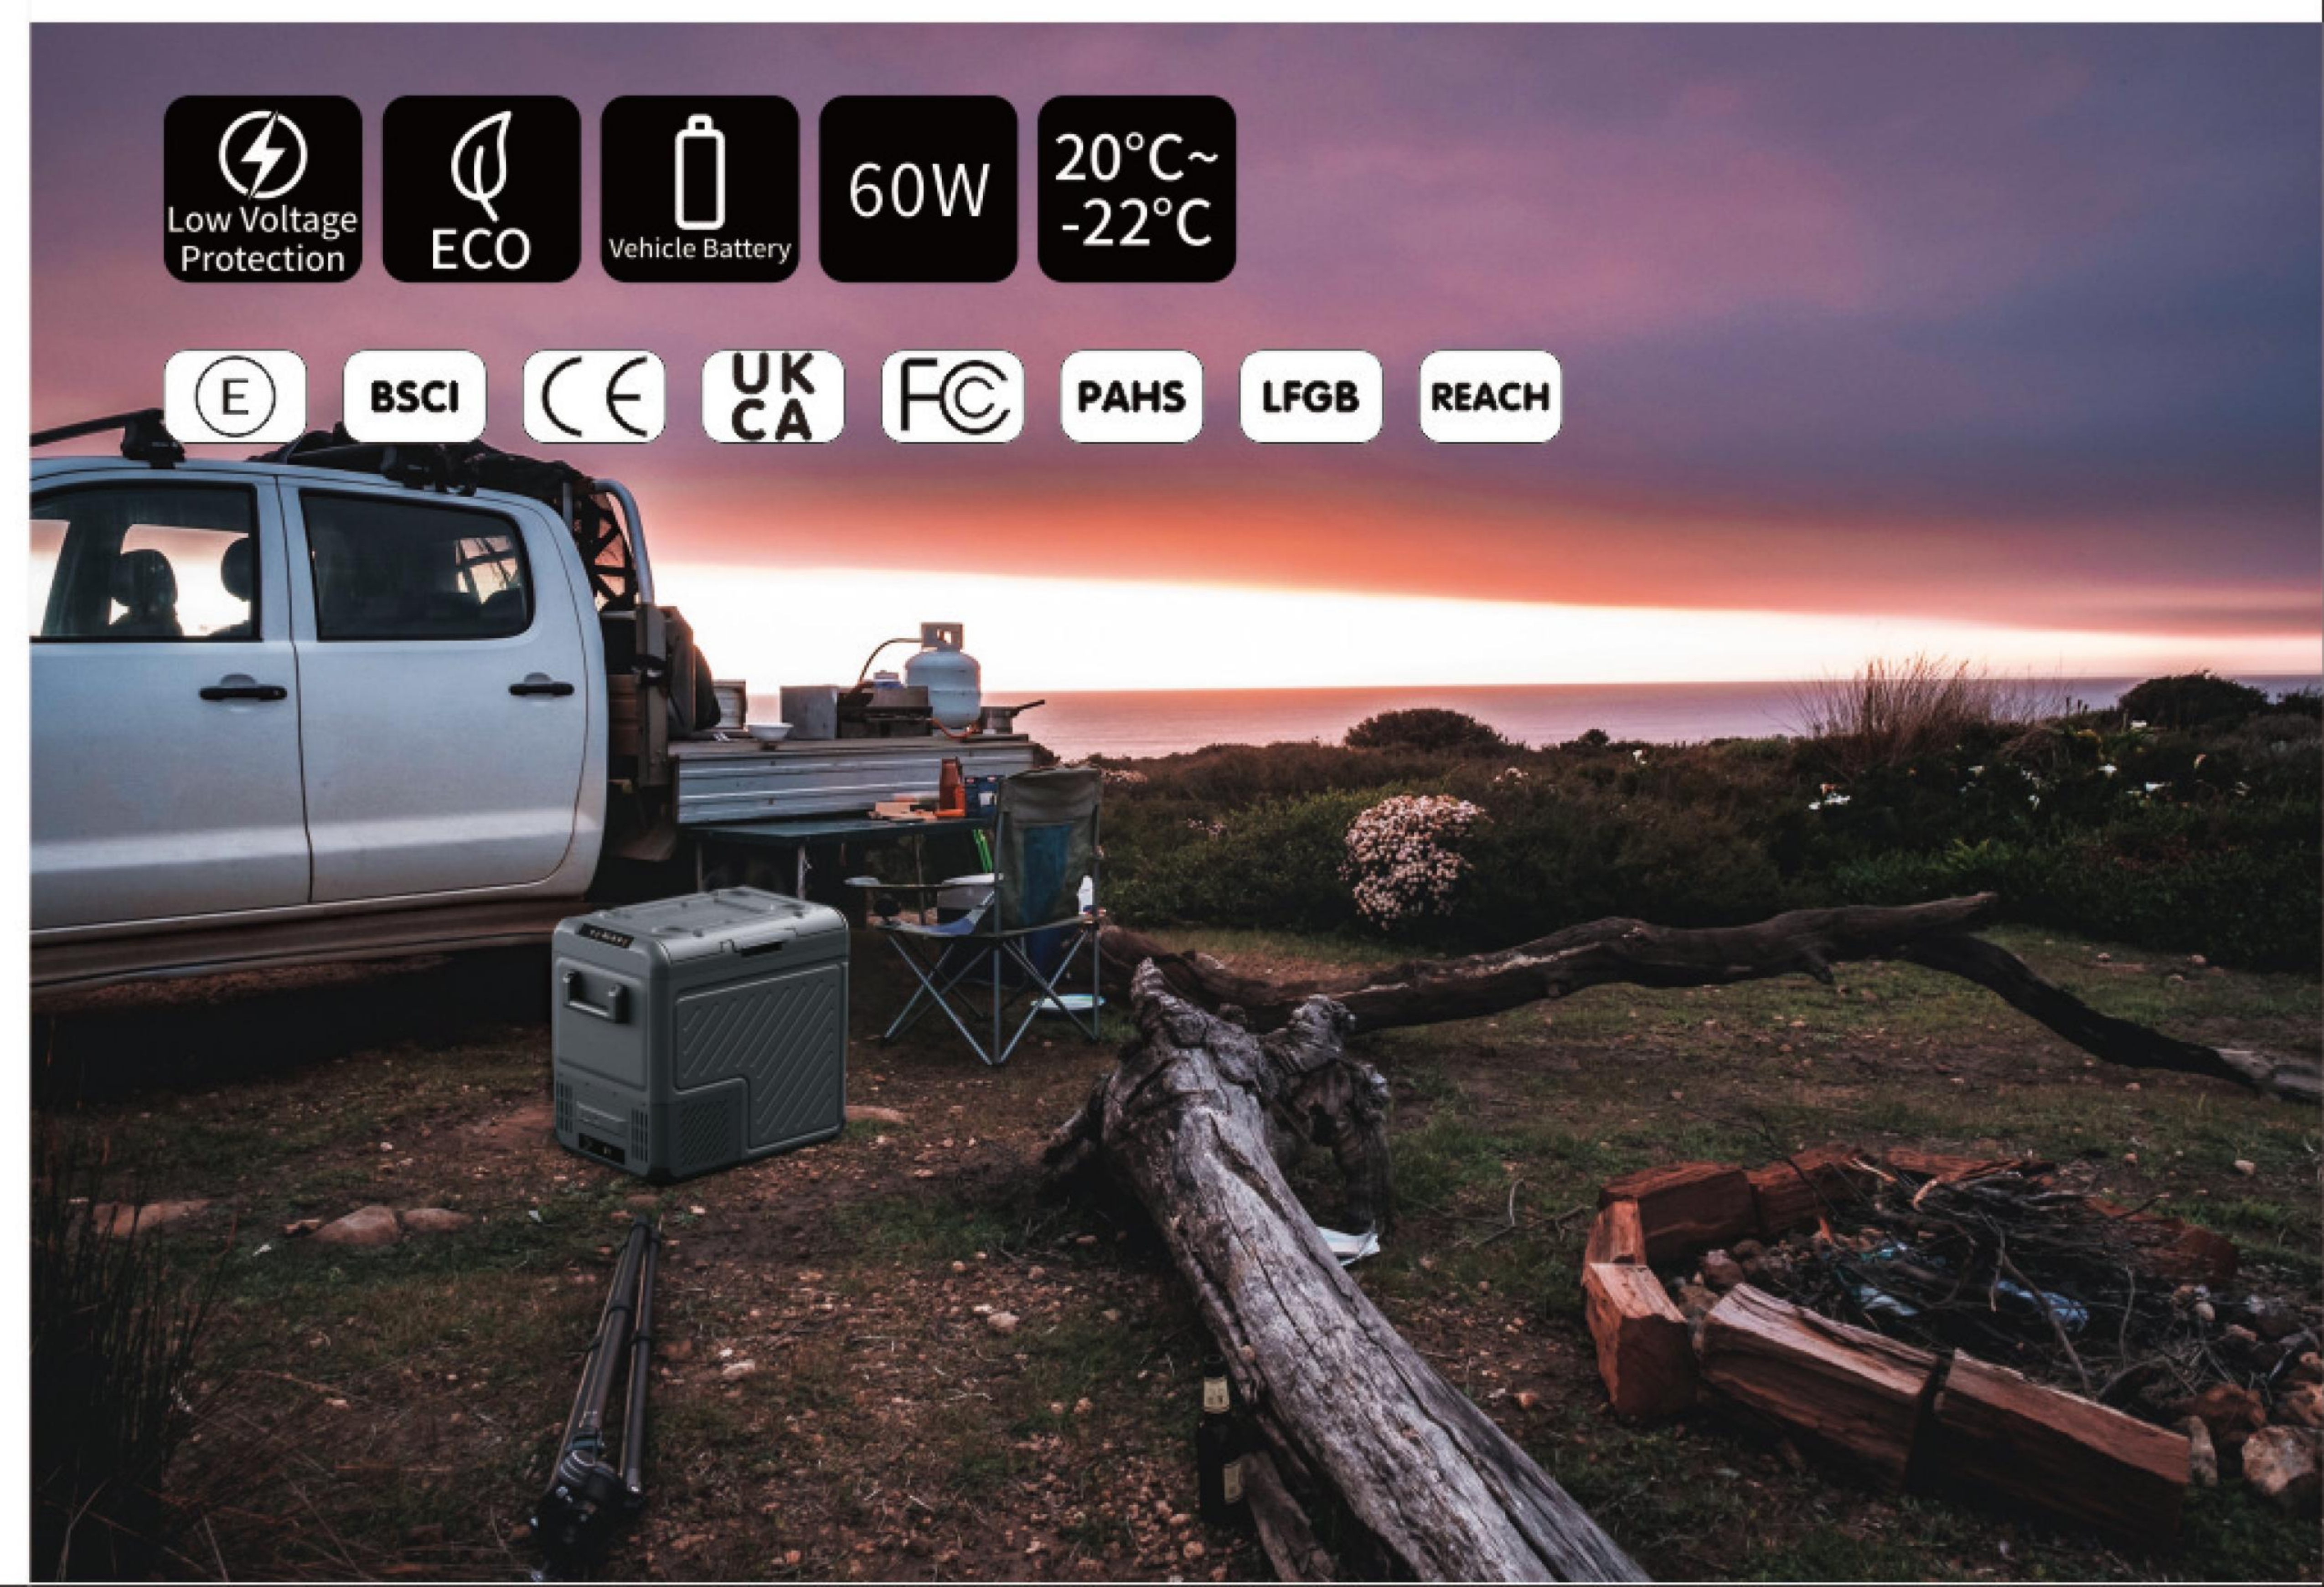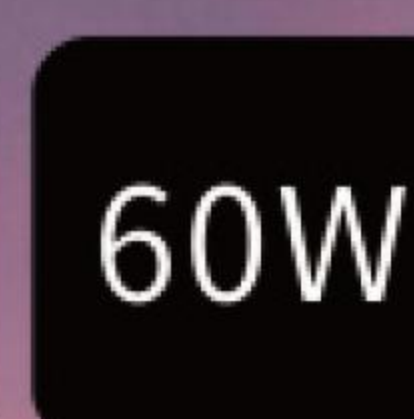



Low Voltage Protection




ECO



Vehicle Battery

36W

20°C~
-22°C



BSCI



UK
CA



PAHS


LFGB

REACH




K-20

- Capacity:19L
- Average power consumption:36W
- N.W.:10.1kg/ G.W.:12kg
- Dimensions:610*320*285mm
- Packing: 655*385*365mm
- FCL Quantity:288/612/714

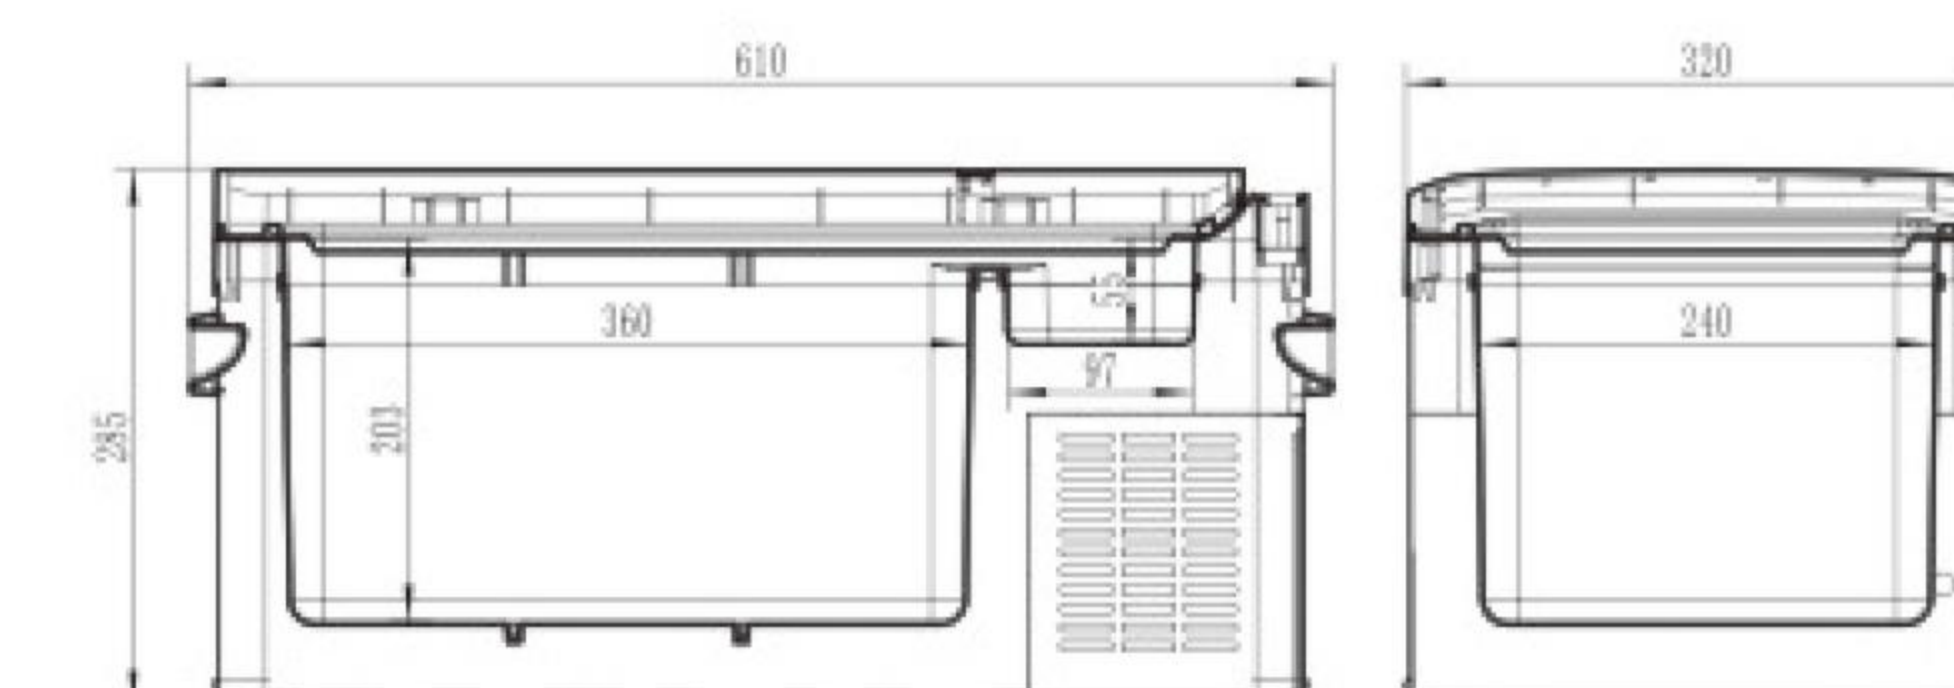

K-26


- Capacity:23L
- Average power consumption:40W
- N.W.:10.7kg/ G.W.:12.3kg
- Dimensions:610*320*335mm
- Packing: 655*385*415mm
- FCL Quantity:240/512/612

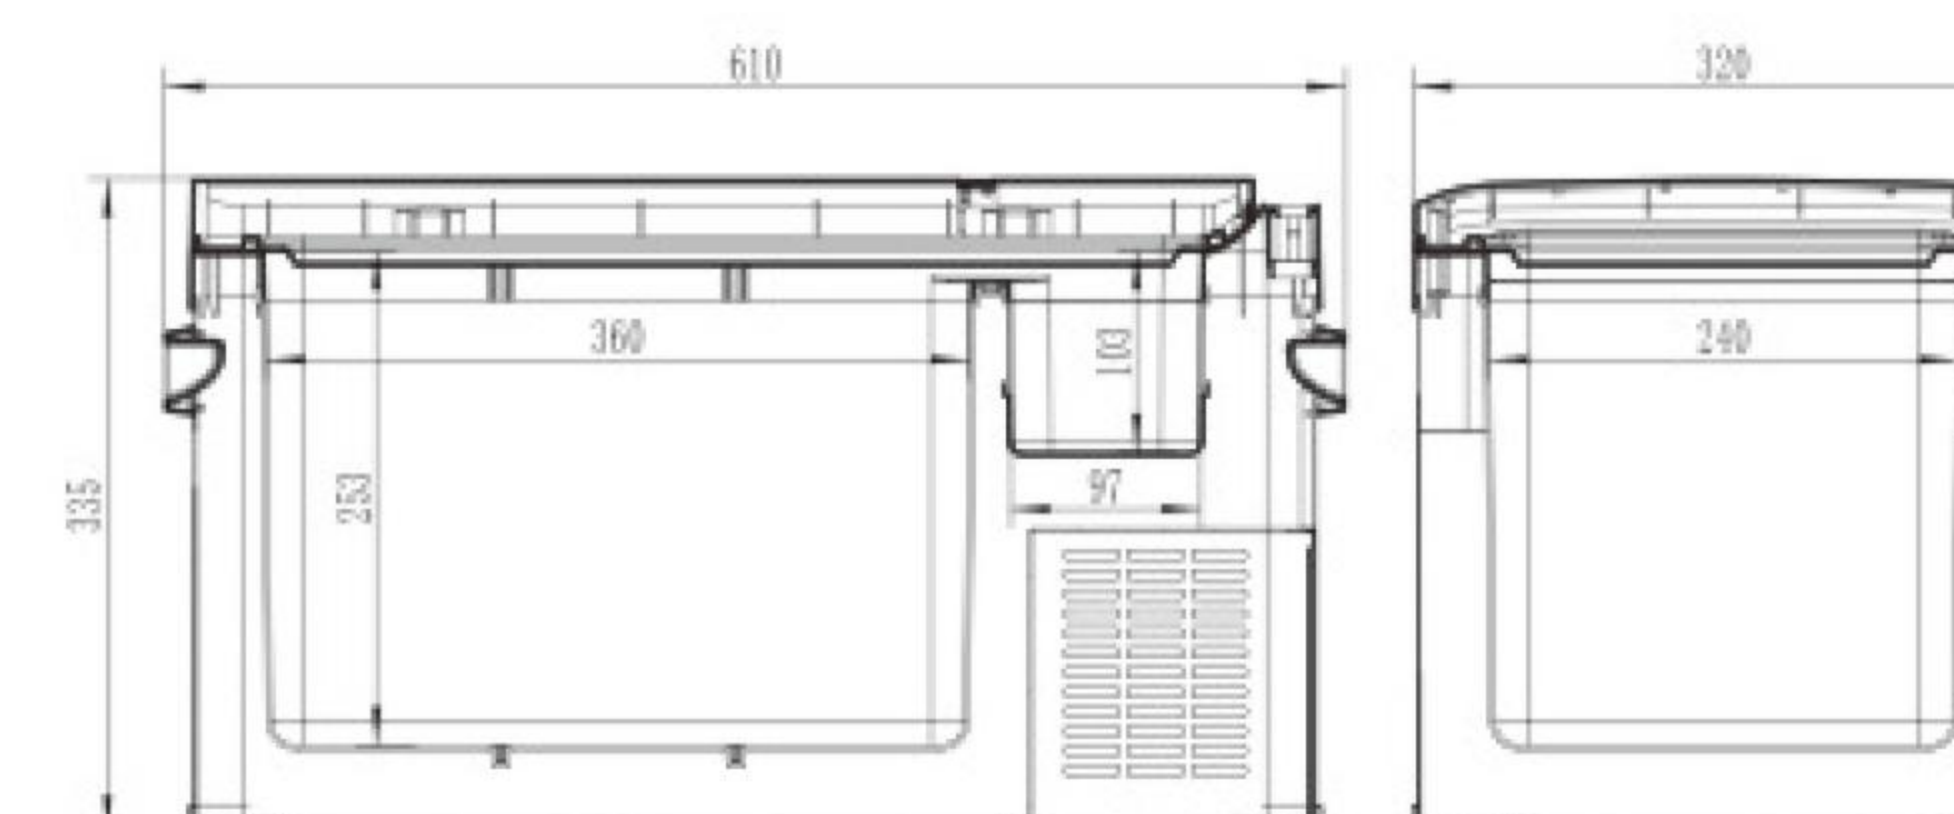




K-30

- Capacity:30L
- Average power consumption:45W
- N.W.:11.6kg/ G.W.:13.6kg
- Dimensions:610*320*400mm
- Packing: 655*385*470mm
- FCL Quantity:192/408/510

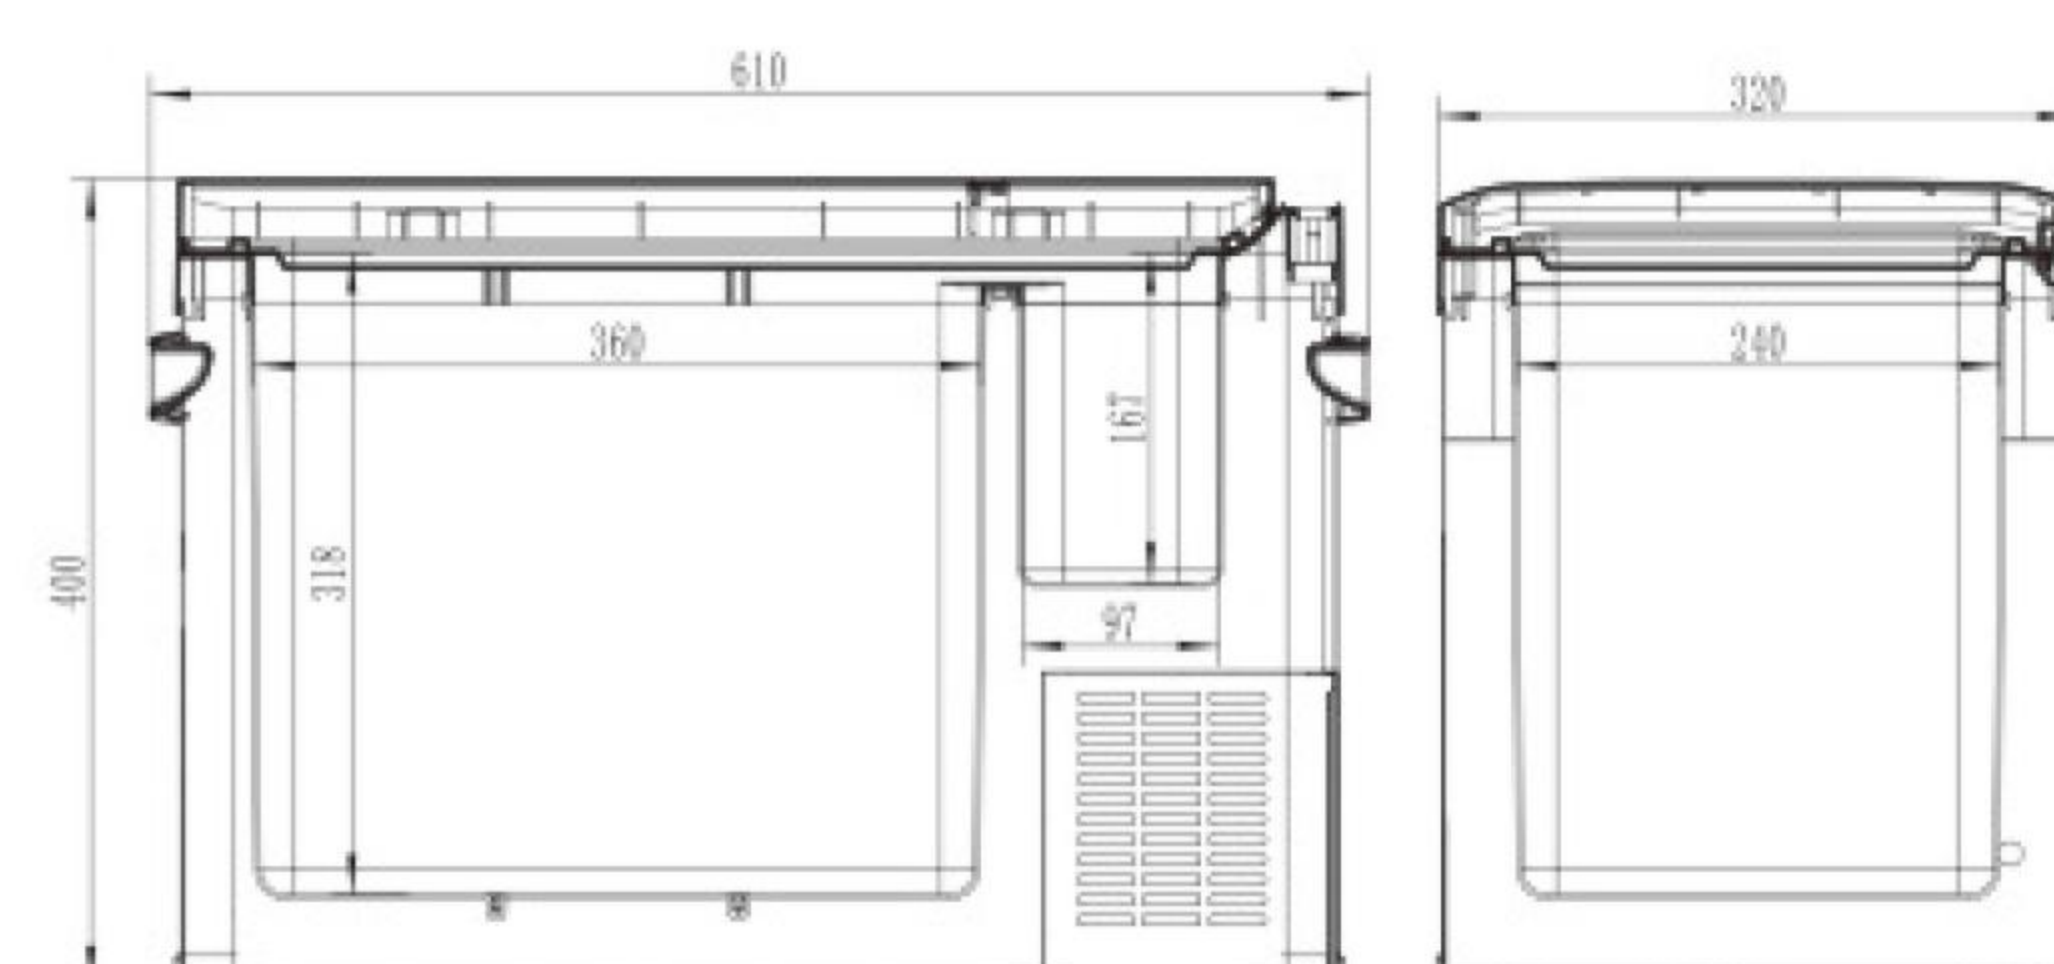



K-26S

- Capacity:23L
- Average power consumption:40W
- N.W.:10.5kg/ G.W.:12.1kg
- Dimensions:578*317*360mm
- Packing: 655*385*415mm
- FCL Quantity:240/510/612

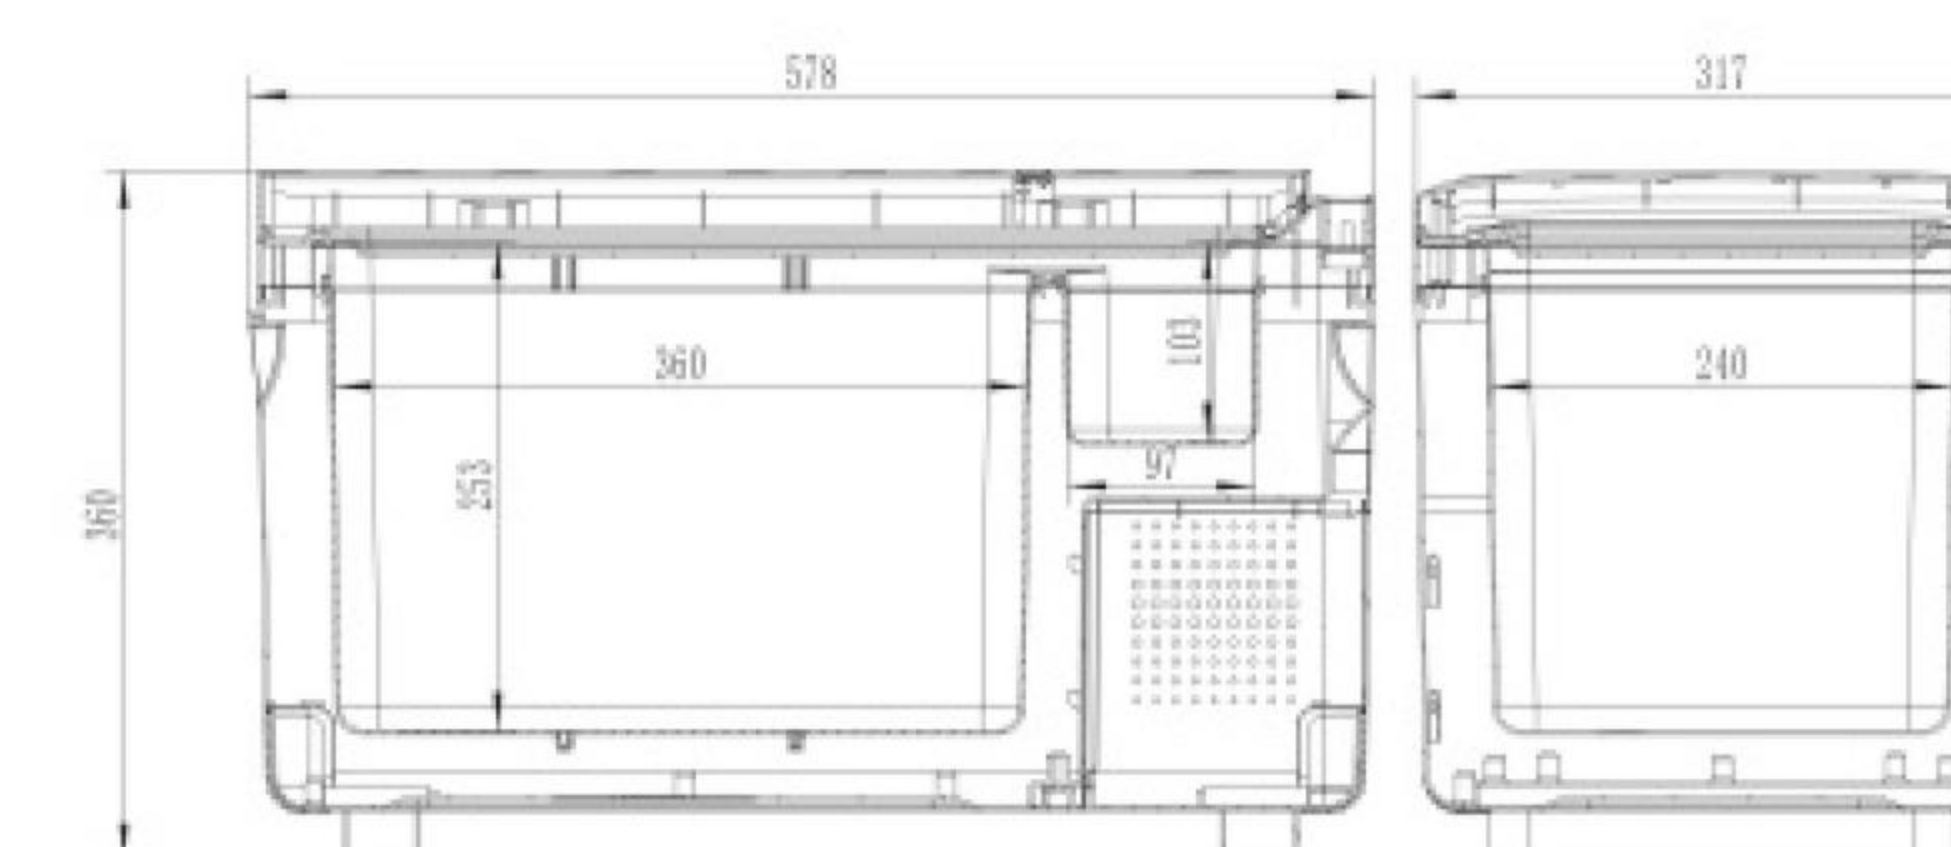

K-30L


- Capacity:30L
- Average power consumption:45W
- N.W.:11.6kg/ G.W.:12/14Kg
- Dimensions:578*350*420mm
- Packing: 655*385*480mm
- FCL Quantity:192/408/510

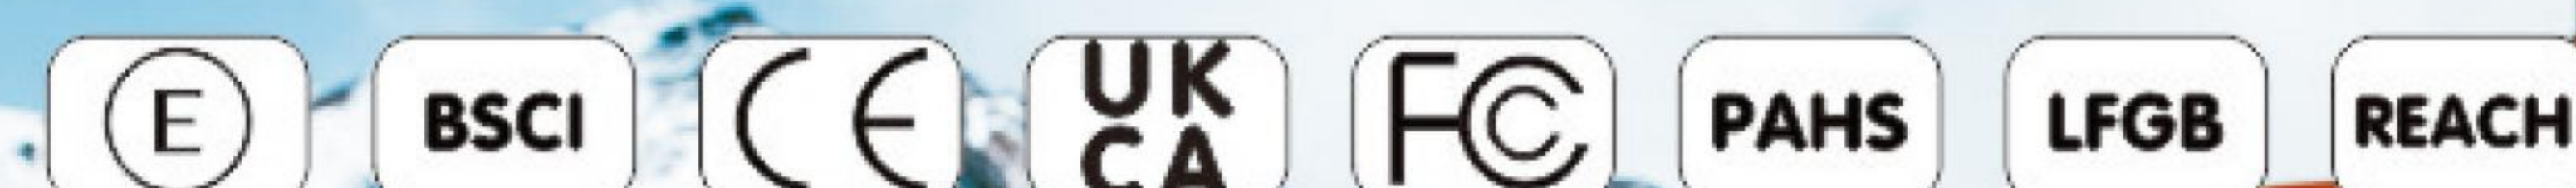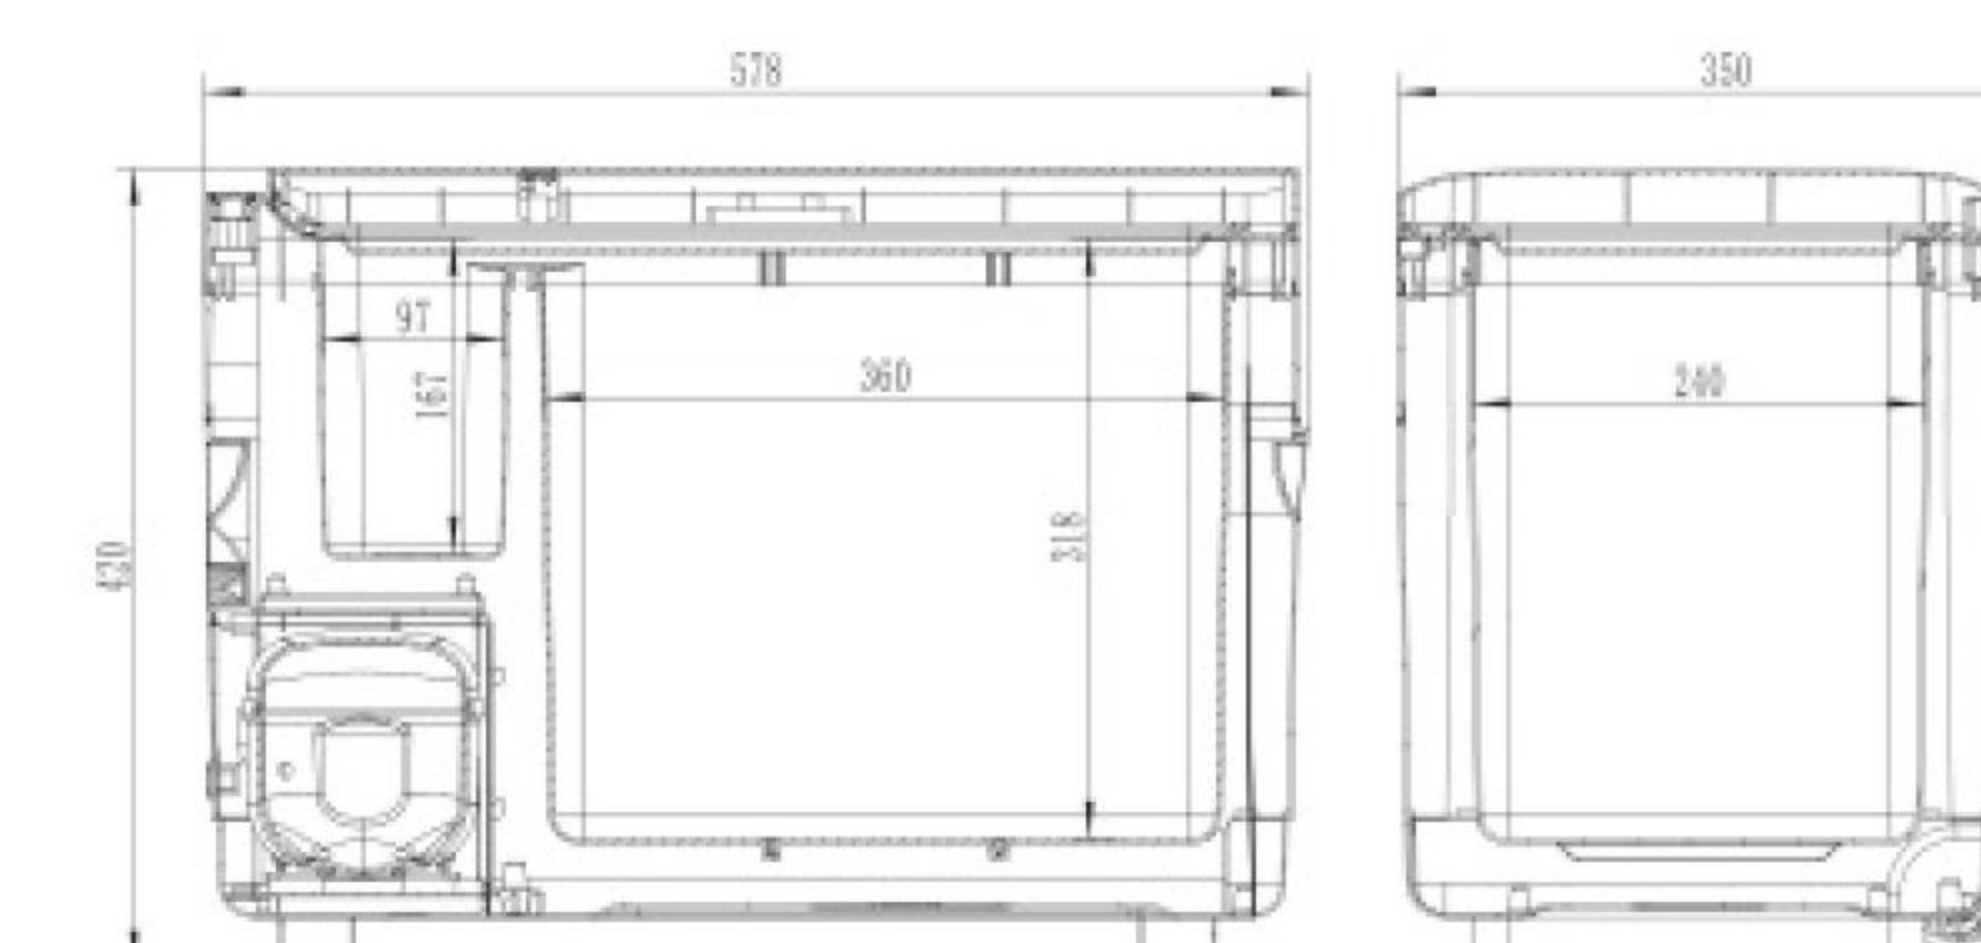




X-15

- Capacity:16.5L
- Average power consumption:40W
- N.W.:10.5kg/ G.W.:12kg
- Dimensions:580*360*280mm
- Packing: 670*450*355mm
- FCL Quantity:258/528/616

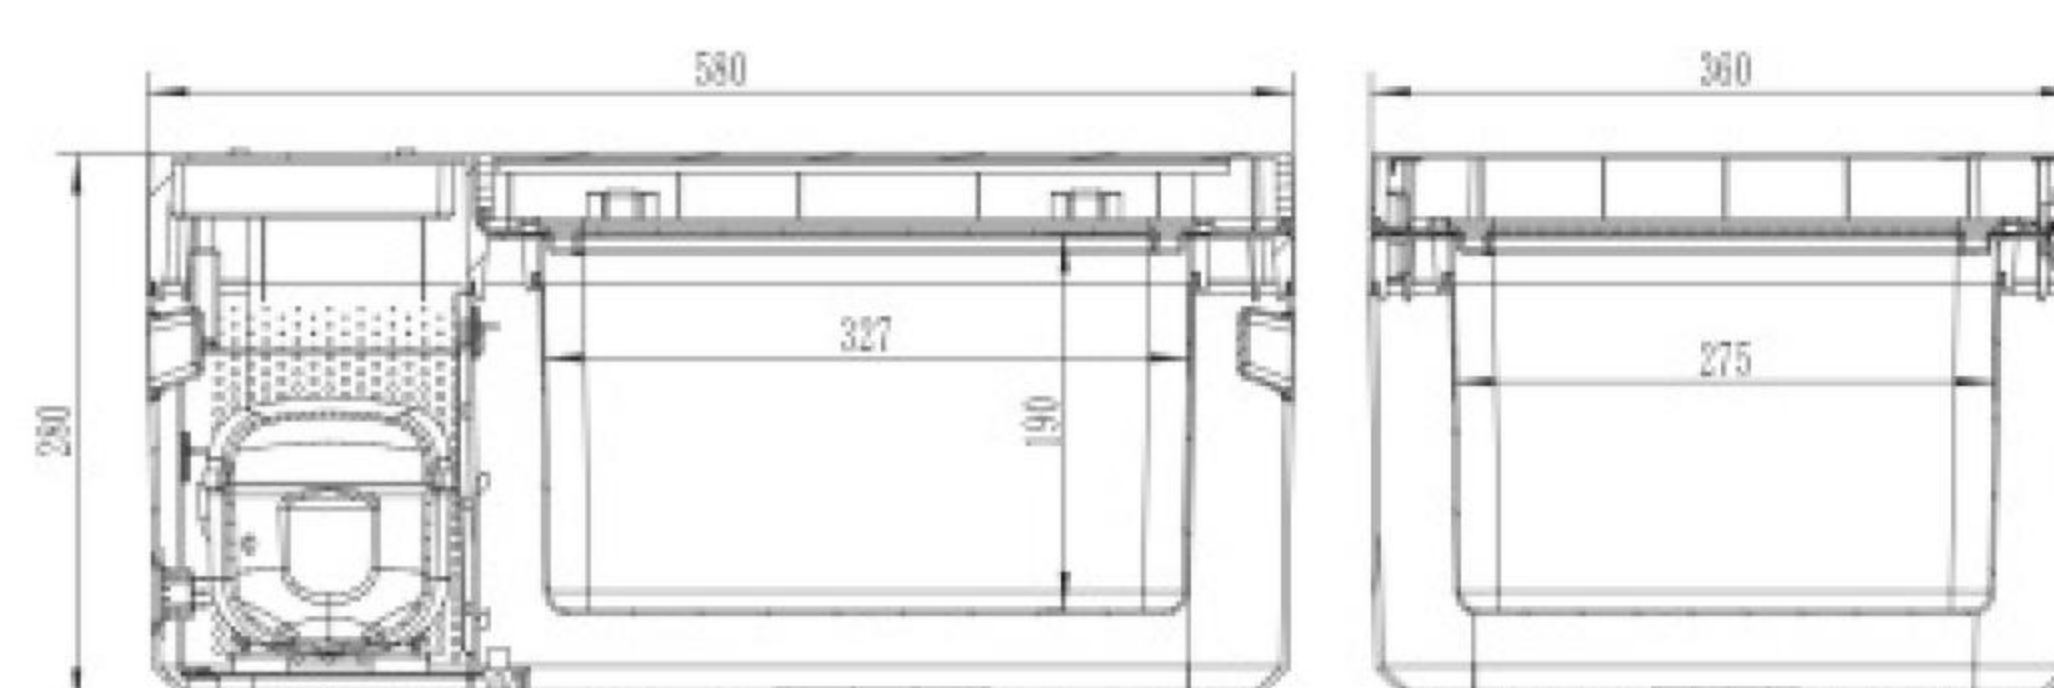

X-25


- Capacity:25L
- Average power consumption:42W
- N.W.:11.5kg/ G.W.:14kg
- Dimensions:580*360*370mm
- Packing: 670*450*445mm
- FCL Quantity:215/440/440

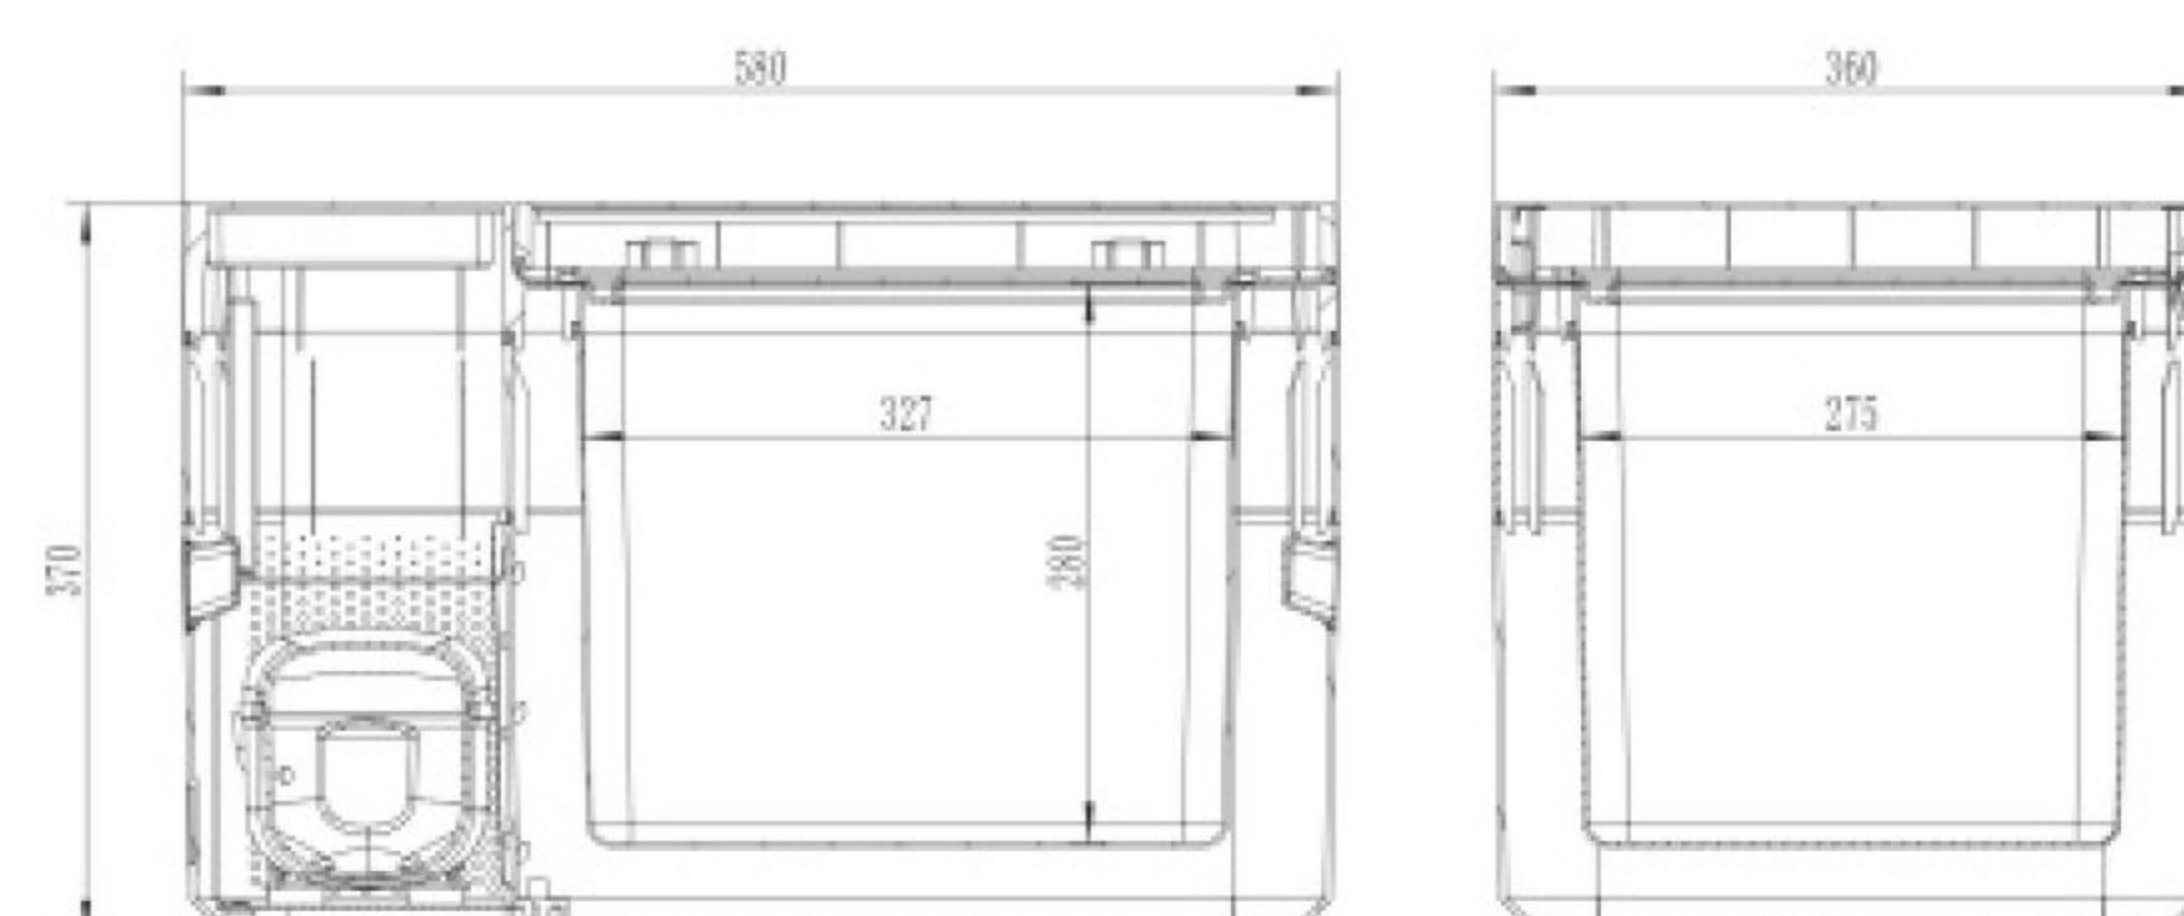




Q-18

- Capacity:17L
- Average power consumption:36W
- N.W.:10.7kg/ G.W.:12.4kg
- Dimensions:610*320*275mm
- Packing: 655*285*355mm
- FCL Quantity:288/612/714

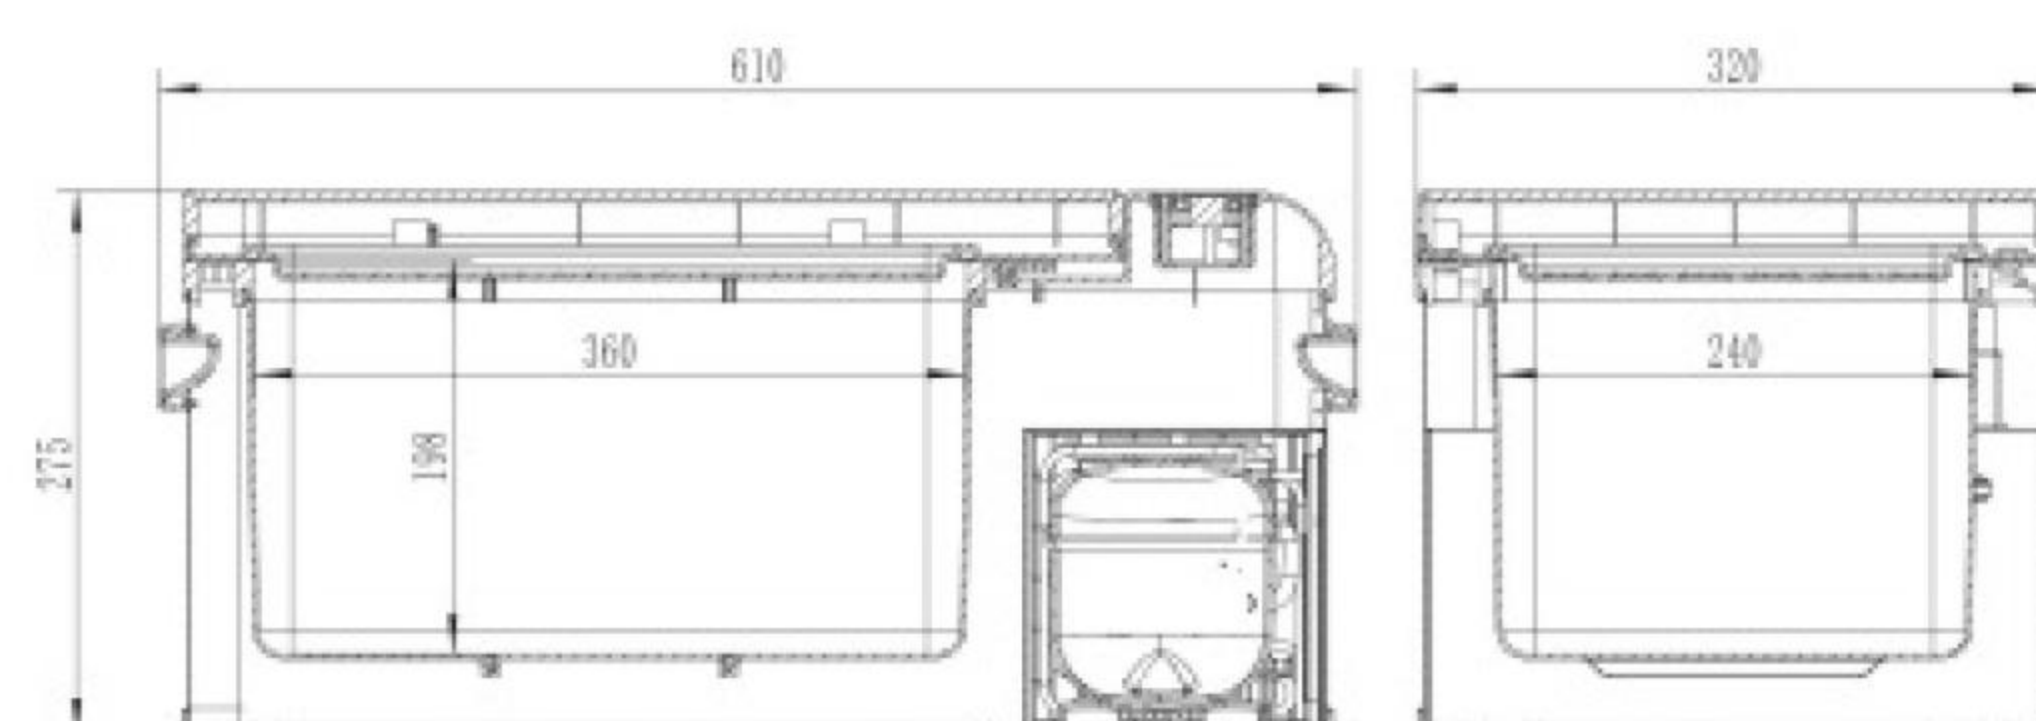





Q-22

- Capacity:20L
- Average power consumption:40W
- N.W.:11.5kg/ G.W.:13.2kg
- Dimensions:610*320*325mm
- Packing: 655*385*405mm
- FCL Quantity:240/510/612

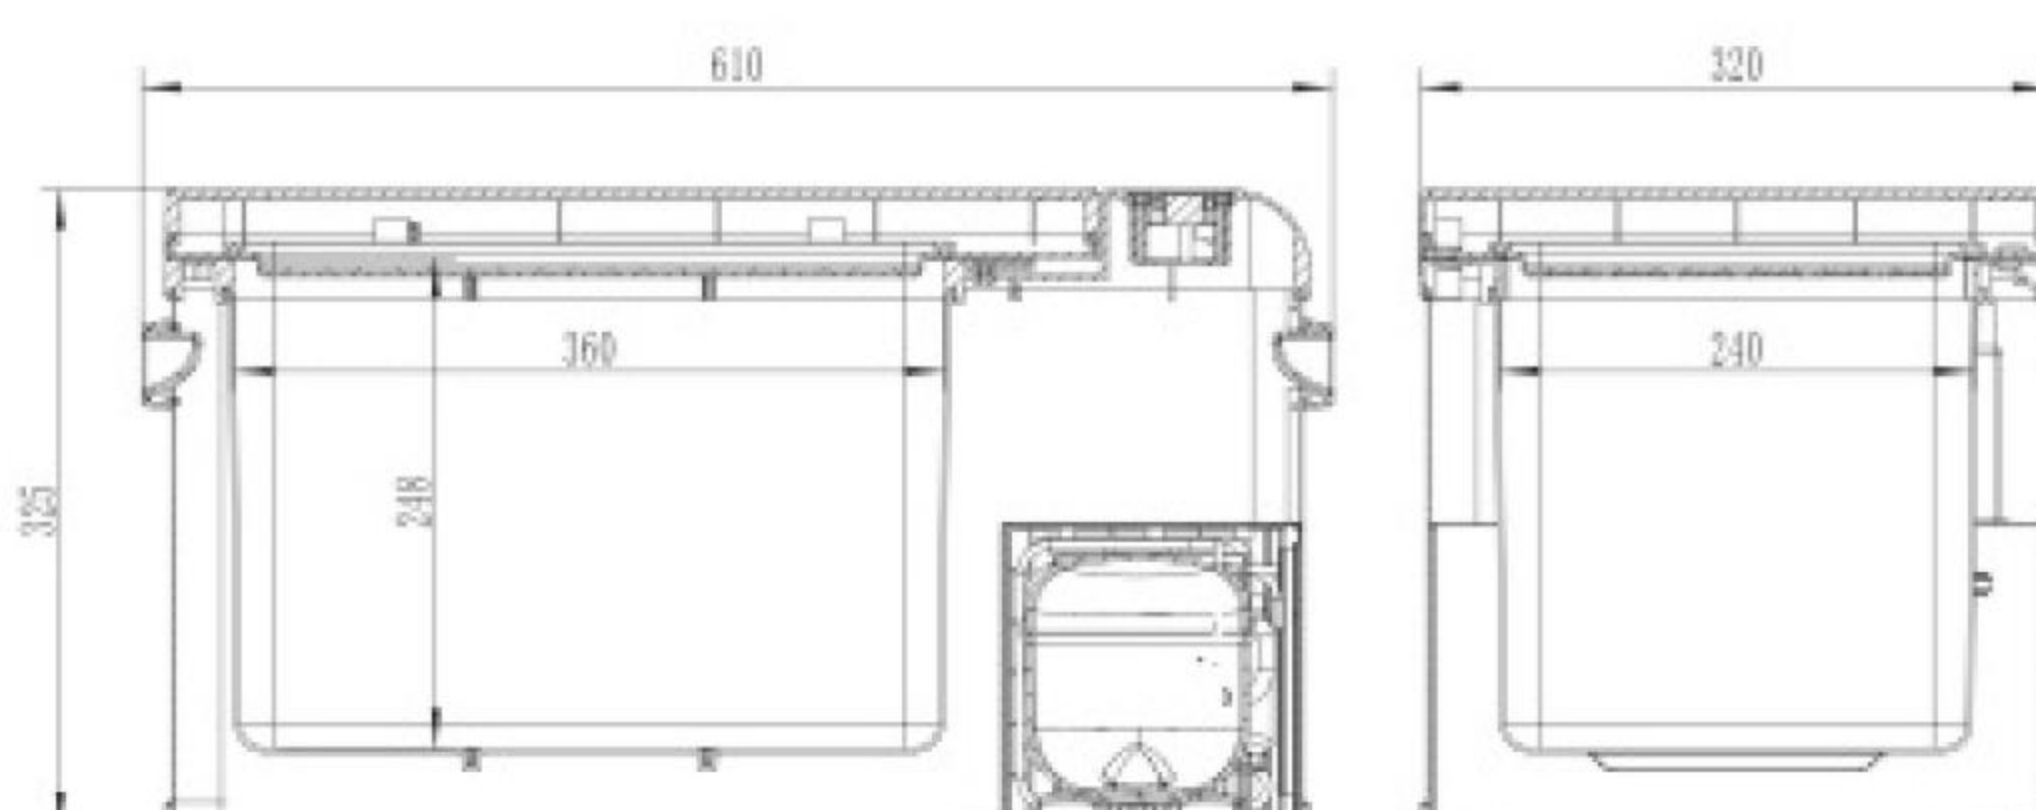

Q-28

- Capacity:27L
- Average power consumption:45W
- N.W.:12kg/ G.W.:15kg
- Dimensions:610*320*390mm
- Packing: 655*385*460mm
- FCL Quantity:192/408/510

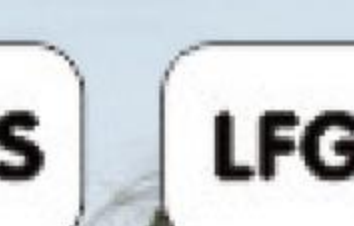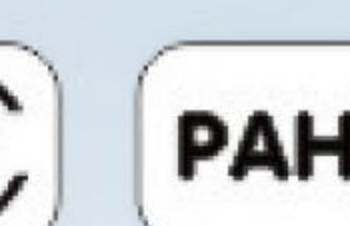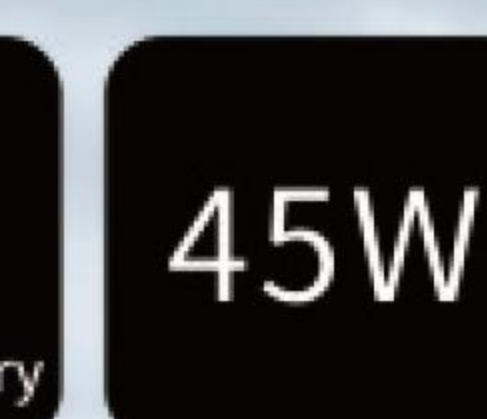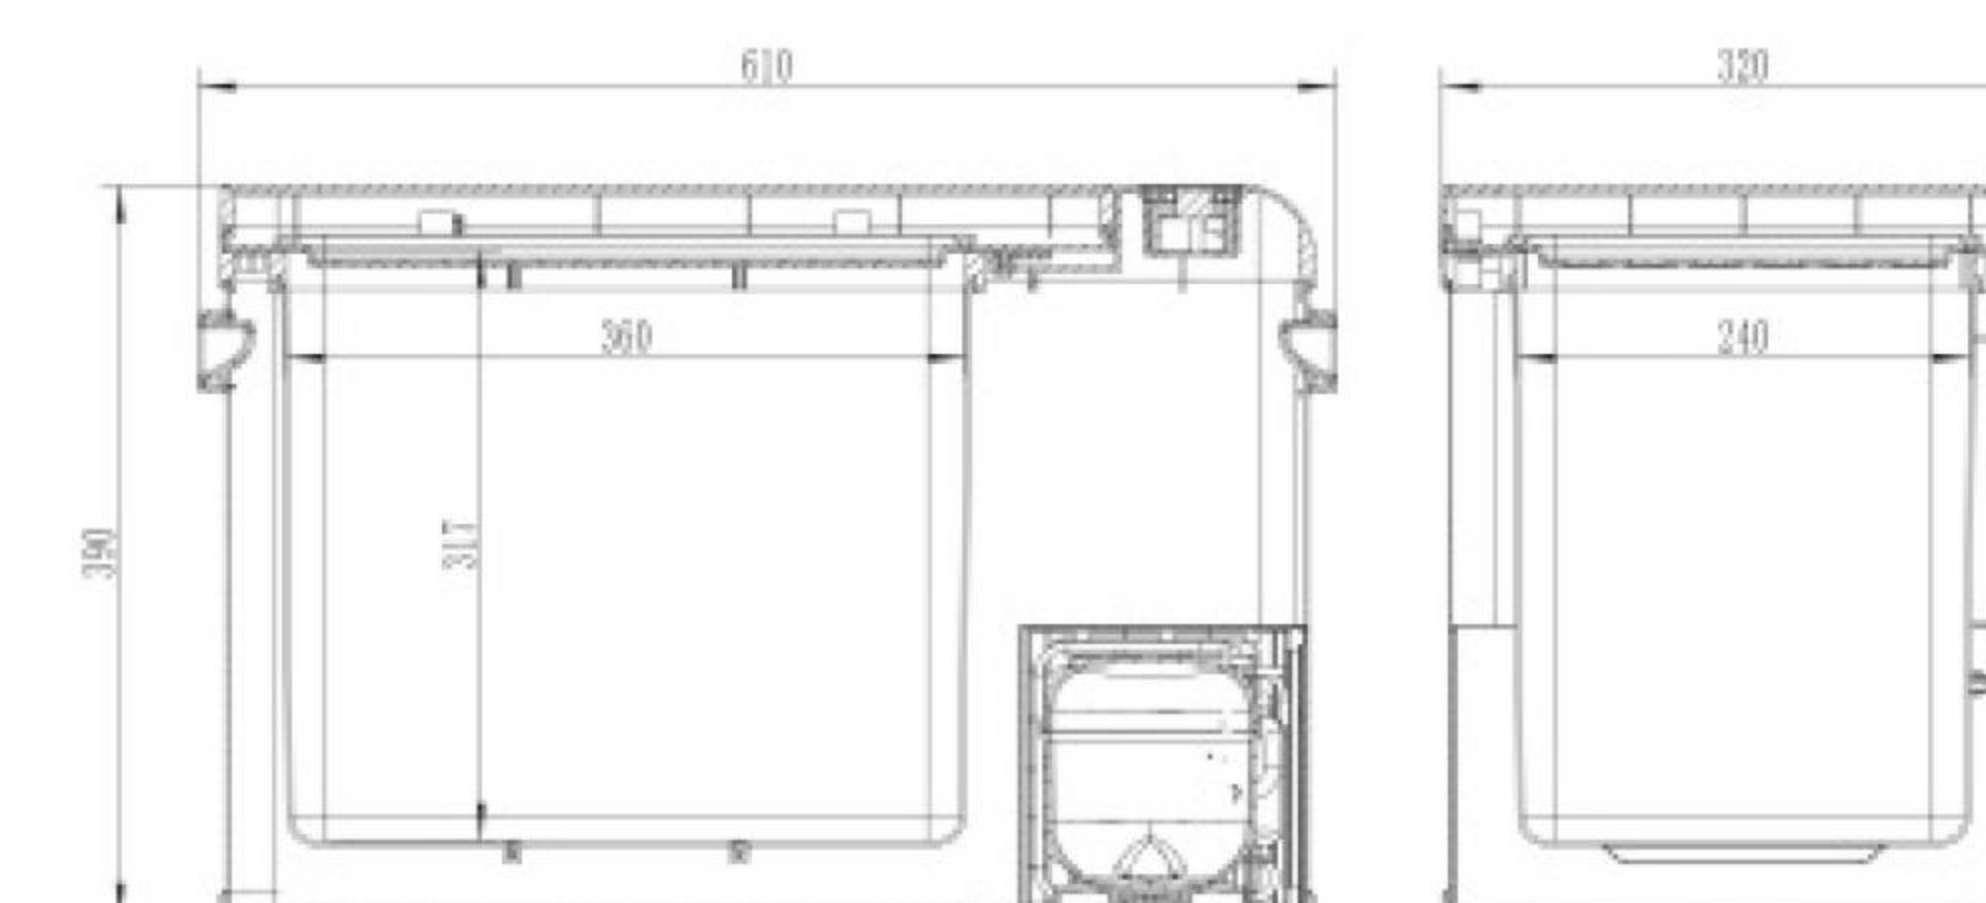



- Low Voltage Protection
- ECO
- Vehicle Battery
- 45W
- 20°C~ -22°C
- E
- BSCI
- CE
- UK CA
- FC
- PAHS
- LFGB
- REACH




- Low Voltage Protection
- ECO
- Vehicle Battery
- 45W
- 20°C~ -22°C
- E
- BSCI
- CE
- UK CA
- FC
- PAHS
- LFGB
- REACH




Q-26

- Capacity:28L
- Average power consumption:45W
- N.W.:12.5kg/ G.W.:15kg
- Dimensions:605*320*395mm
- Packing: 655*375*460mm
- FCL Quantity:254/540/540

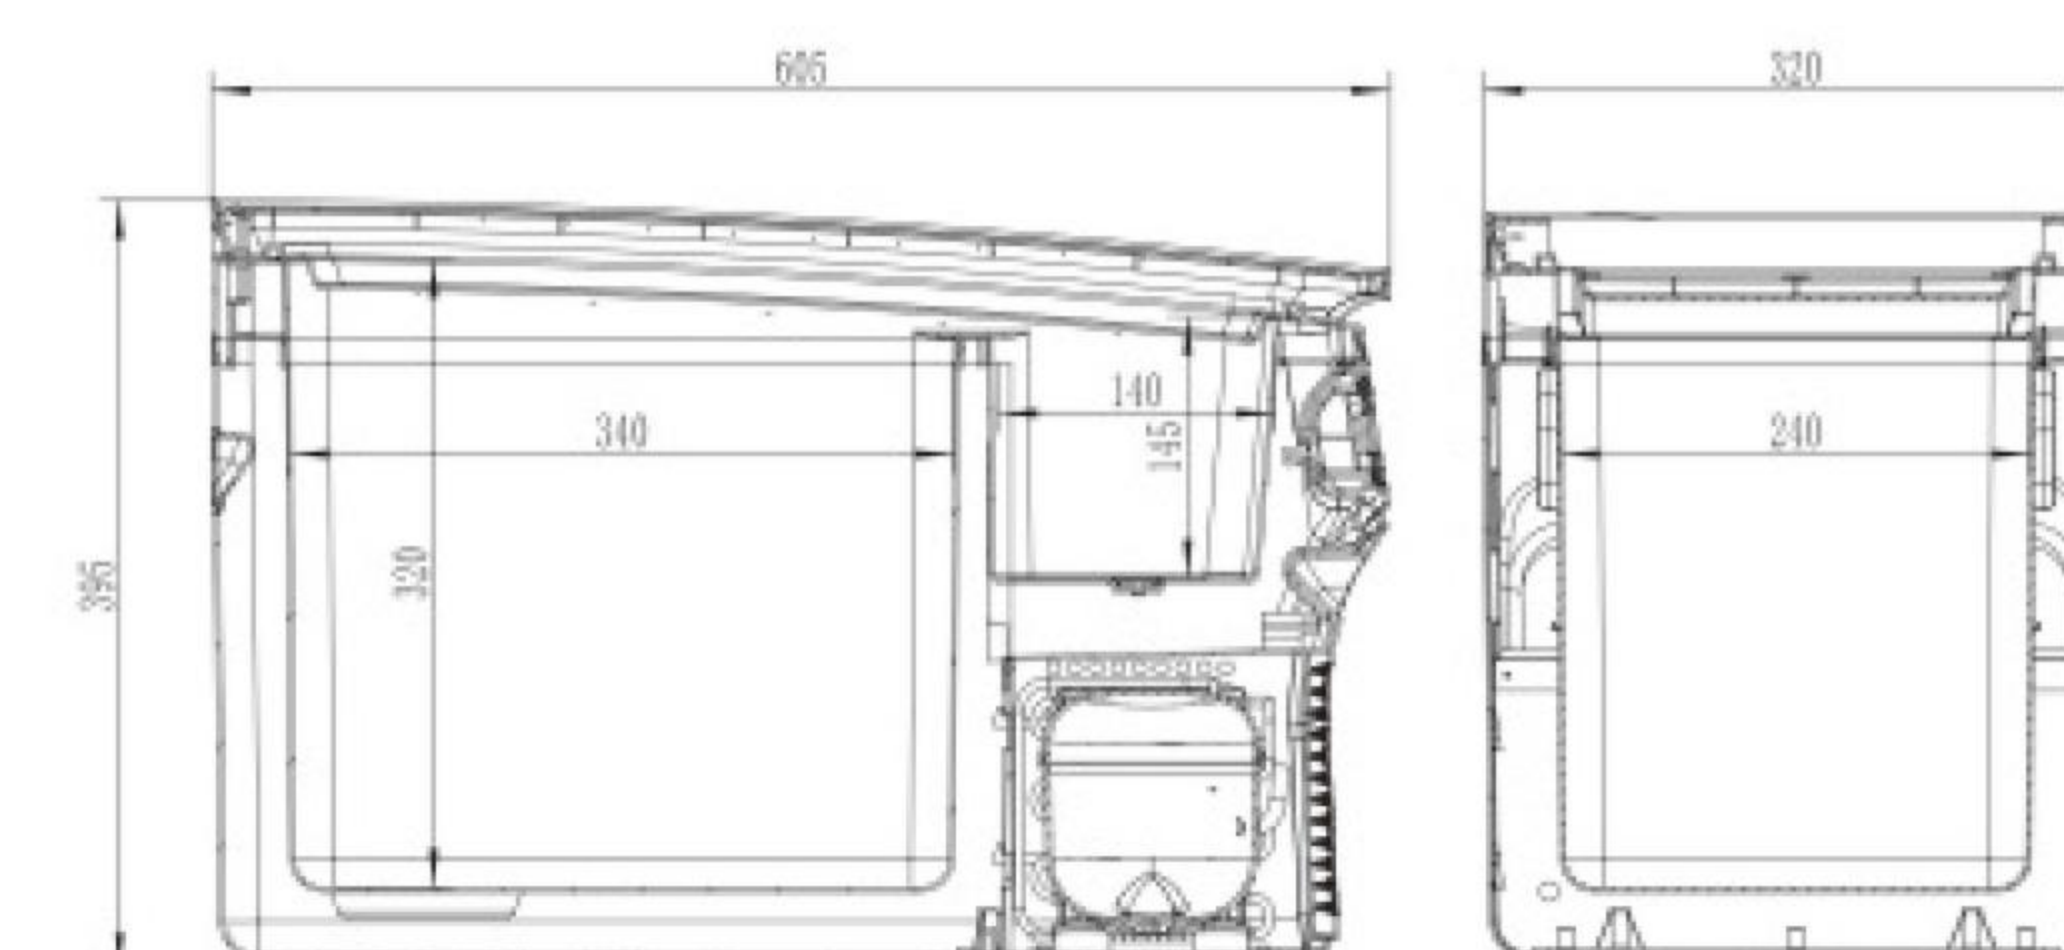

Q-36

- Capacity:32L
- Average power consumption:48W
- N.W.:13kg/ G.W.:15.5kg
- Dimensions:605*320*445mm
- Packing: 655*375*510mm
- FCL Quantity:204/432/540

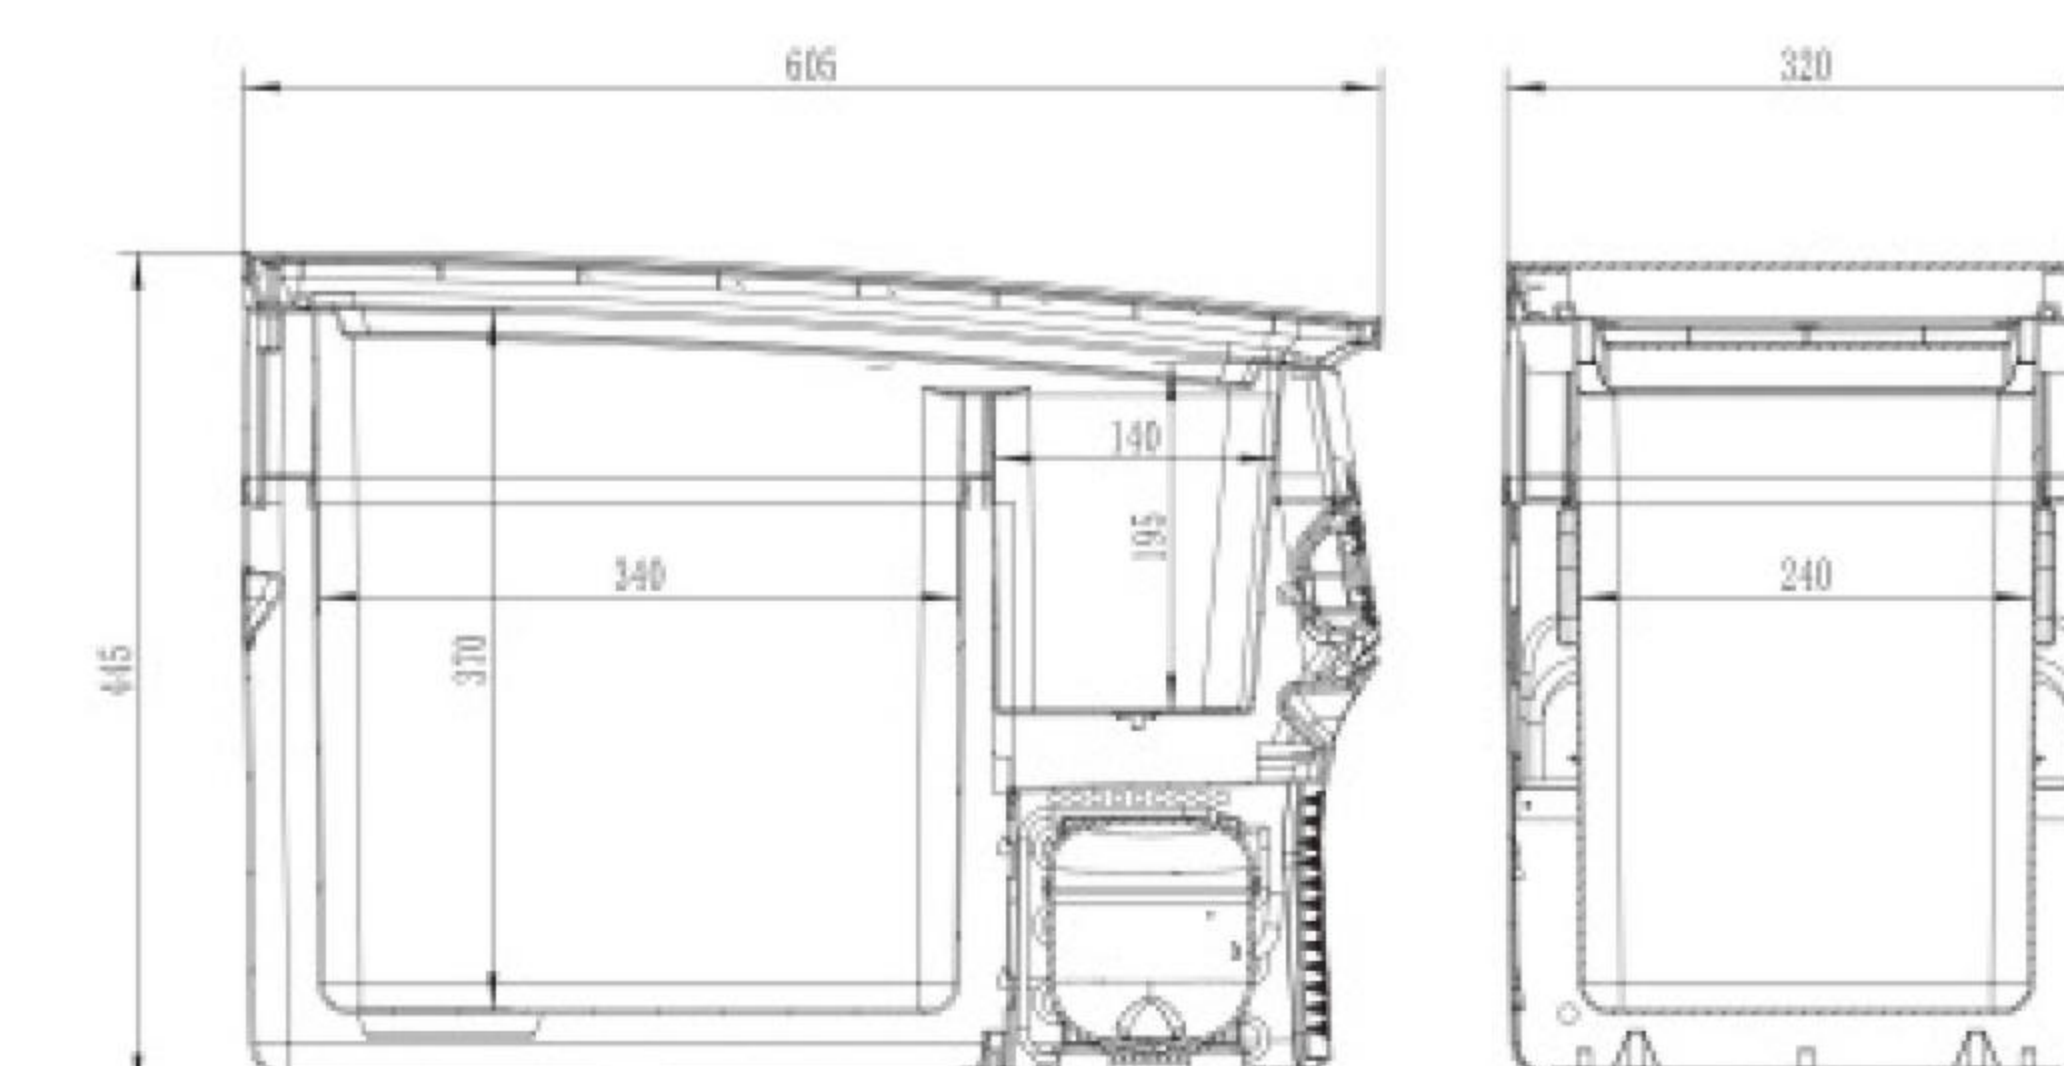



Low Voltage
Protection



ECO



Vehicle Battery

45W

20°C~
-22°C



E

BSCI



CE

UK
CA



FC

PAHS


LFGB

REACH



Q-30

- Capacity:30L
- Average power consumption:45W
- N.W.:14.7kg/ G.W.:16.8kg
- Dimensions:742*360*340mm
- Packing: 755*425*405mm
- FCL Quantity:195/405/486

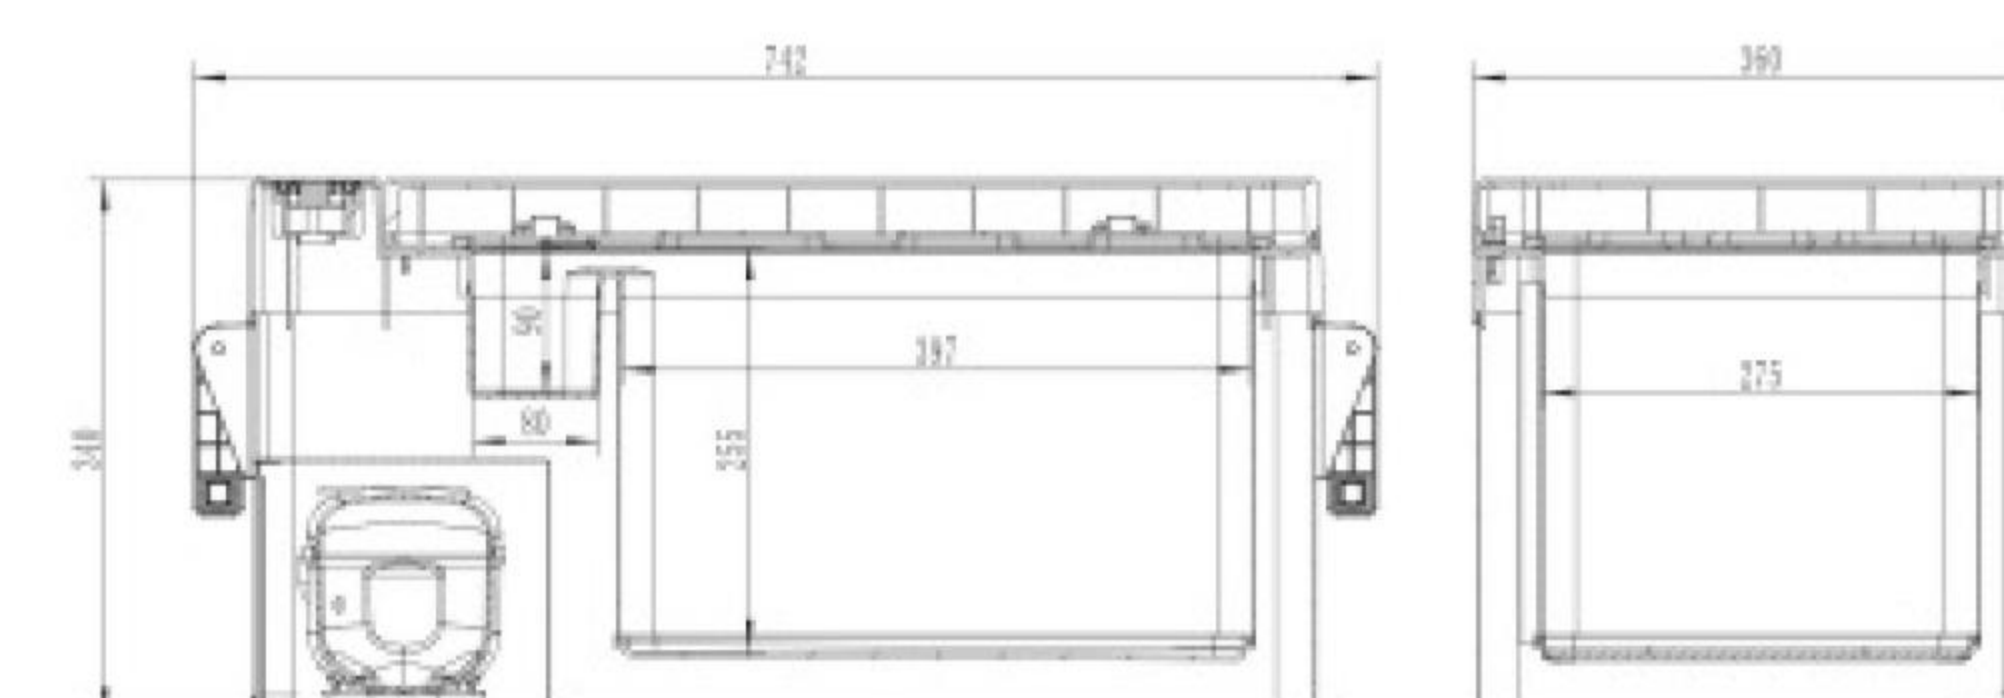

Low Voltage
Protection



ECO



Vehicle Battery

45W

20°C~
-22°C



E

BSCI



CE

UK
CA



FC

PAHS


LFGB

REACH




Q-40

- Capacity:38L
- Average power consumption:48W
- N.W.:15.3kg/ G.W.:17.5kg
- Dimensions:742*360*405mm
- Packing: 755*425*470mm
- FCL Quantity:195/405/405

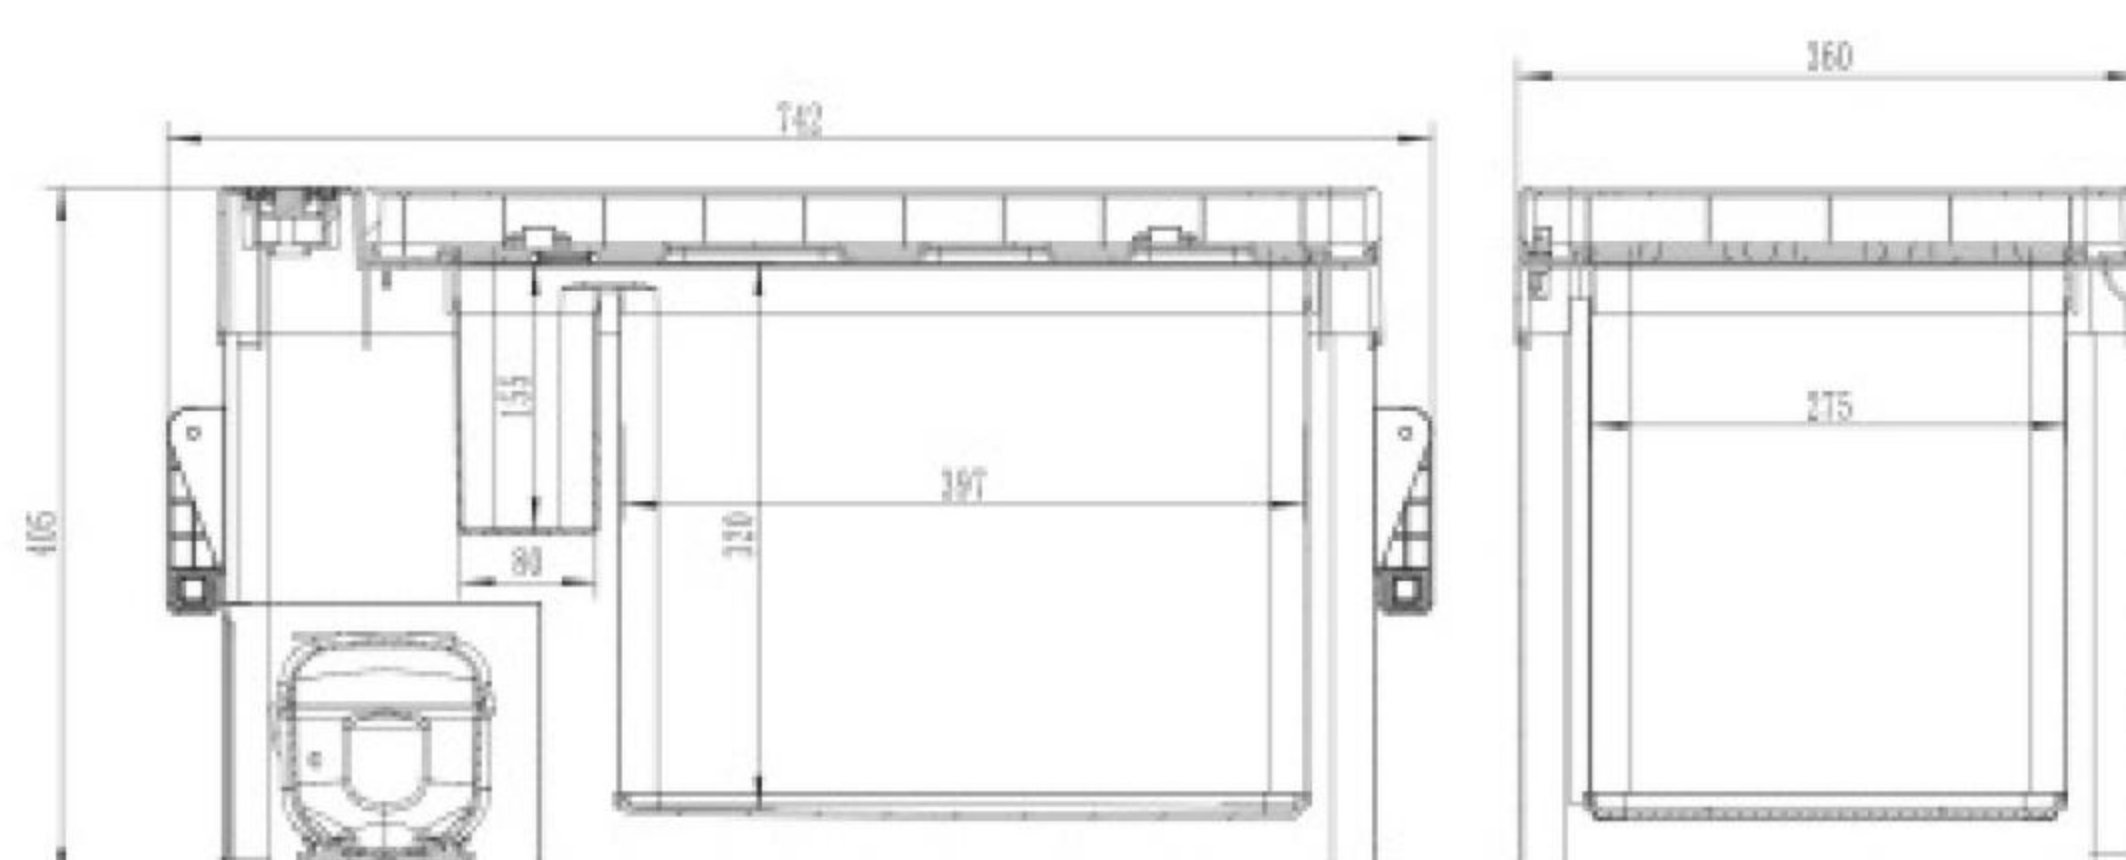


Q-55

- Capacity:50L
- Average power consumption:50W
- N.W.:16kg/ G.W.:19.5kg
- Dimensions:742*360*495mm
- Packing: 755*425*560mm
- FCL Quantity:156/324/324

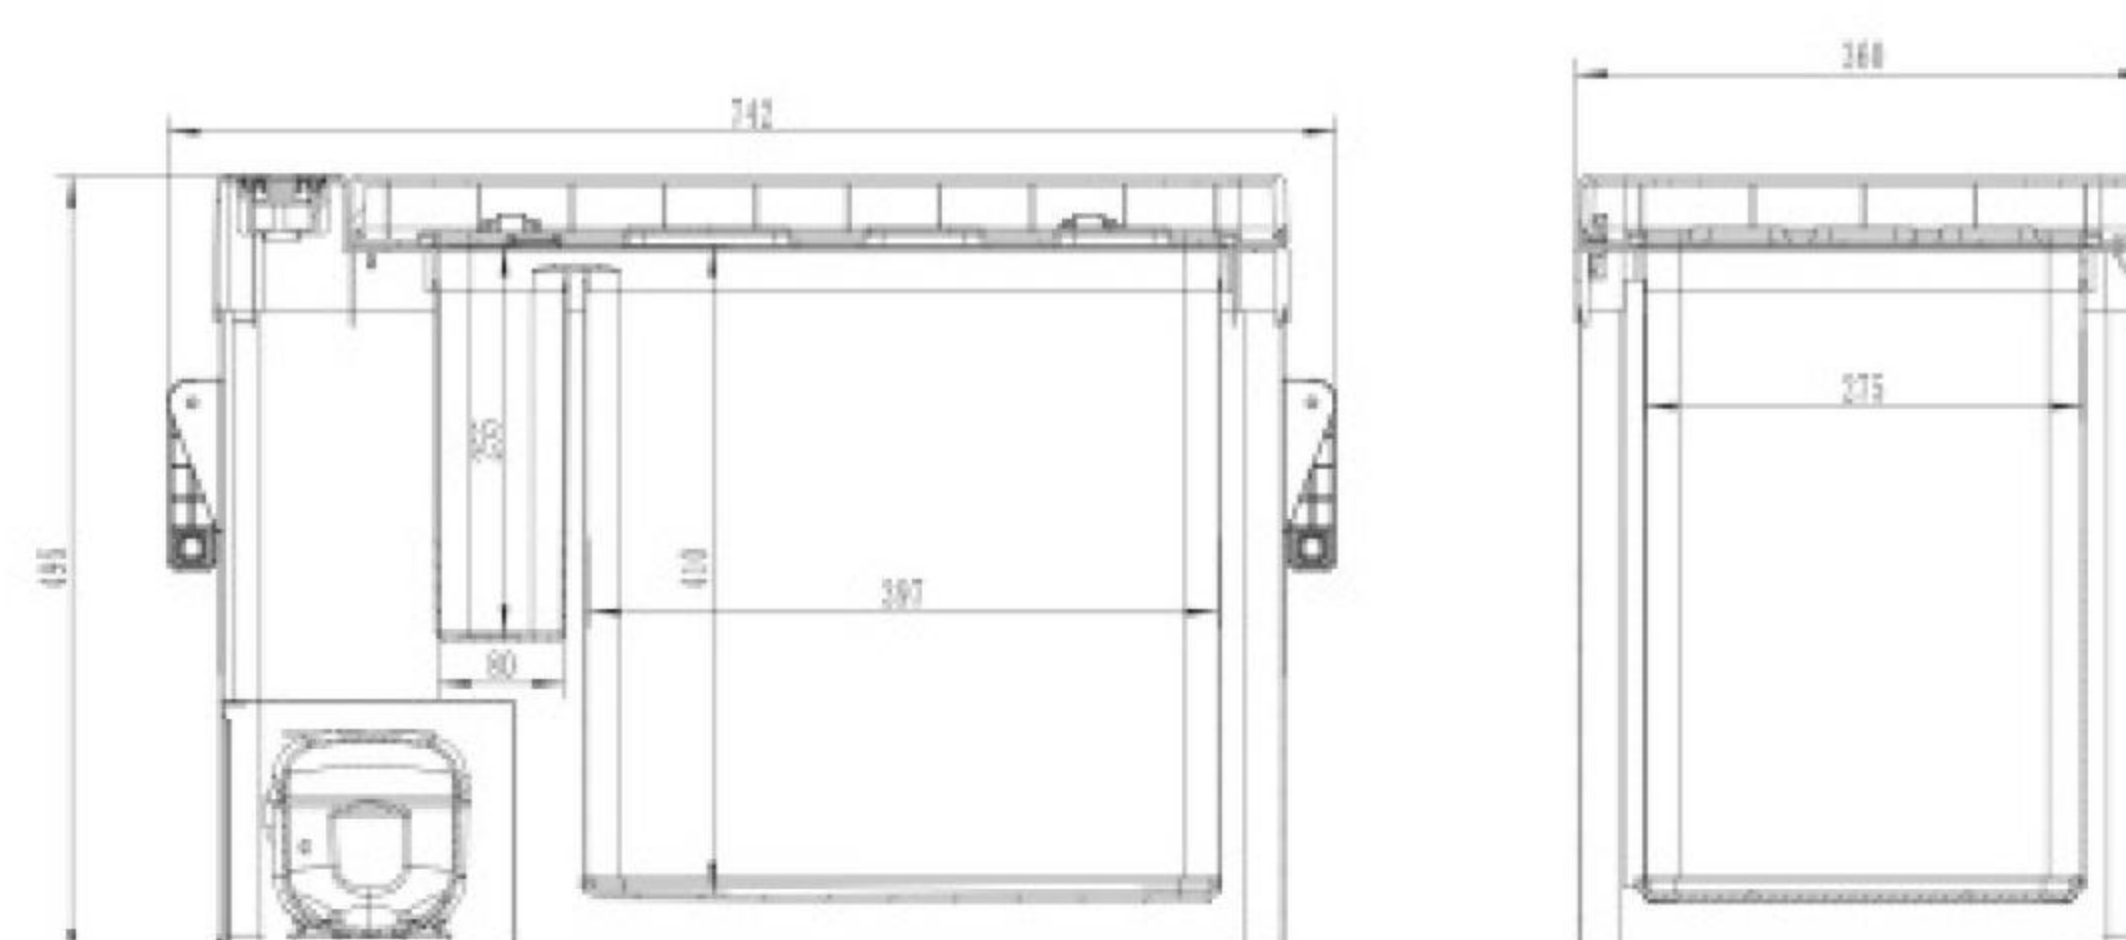

Q-65


- Capacity:60L
- Average power consumption:55W
- N.W.:16kg/ G.W.:17.6/ 20.5
- Dimensions:742*360*590mm
- Packing: 755*425*650mm
- FCL Quantity:117/243/324

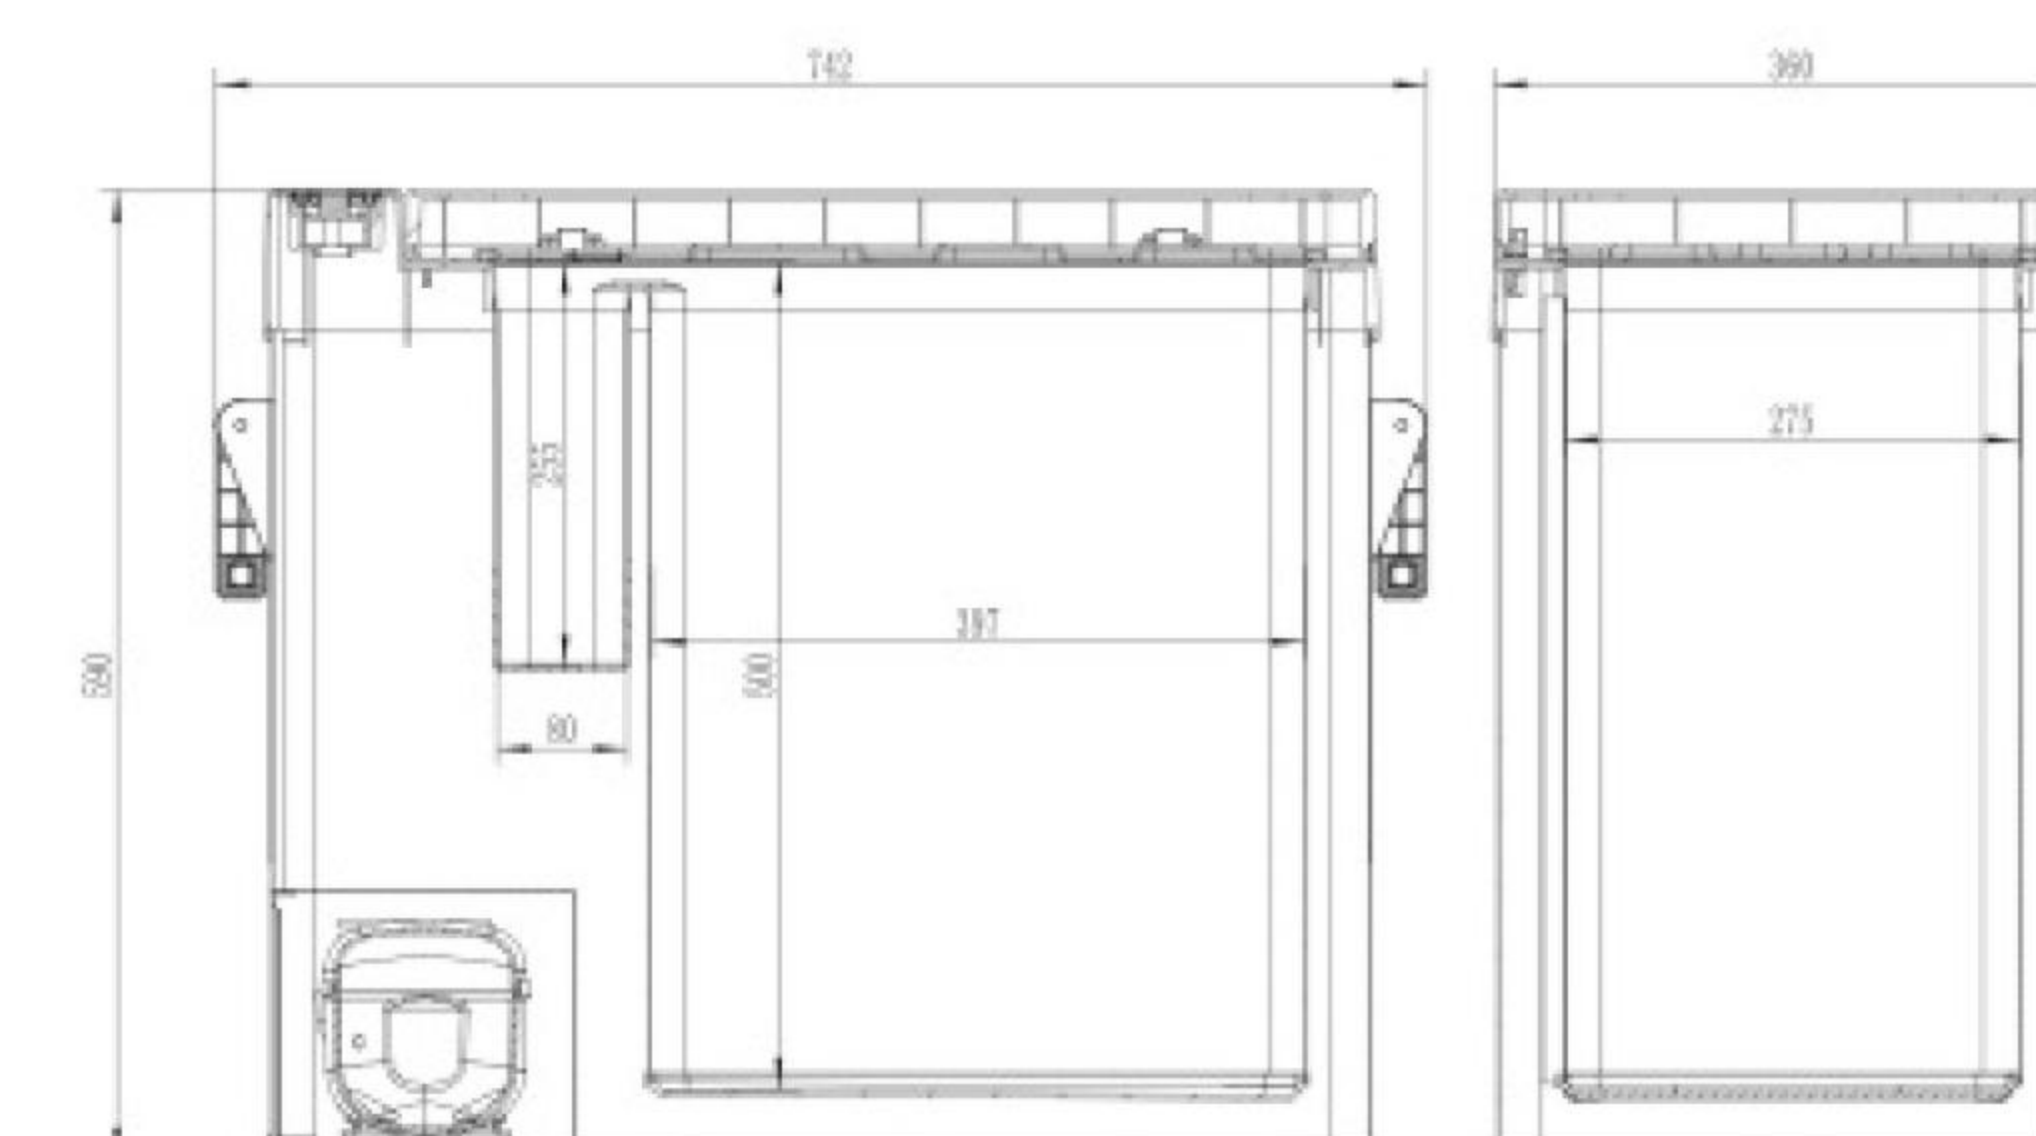




HF-01

- Capacity:35L
- Average power consumption:47W
- N.W.:16kg/ G.W.:18kg
- Dimensions:632*420*428mm
- Packing: 665*475*500mm
- FCL Quantity:144/288/360

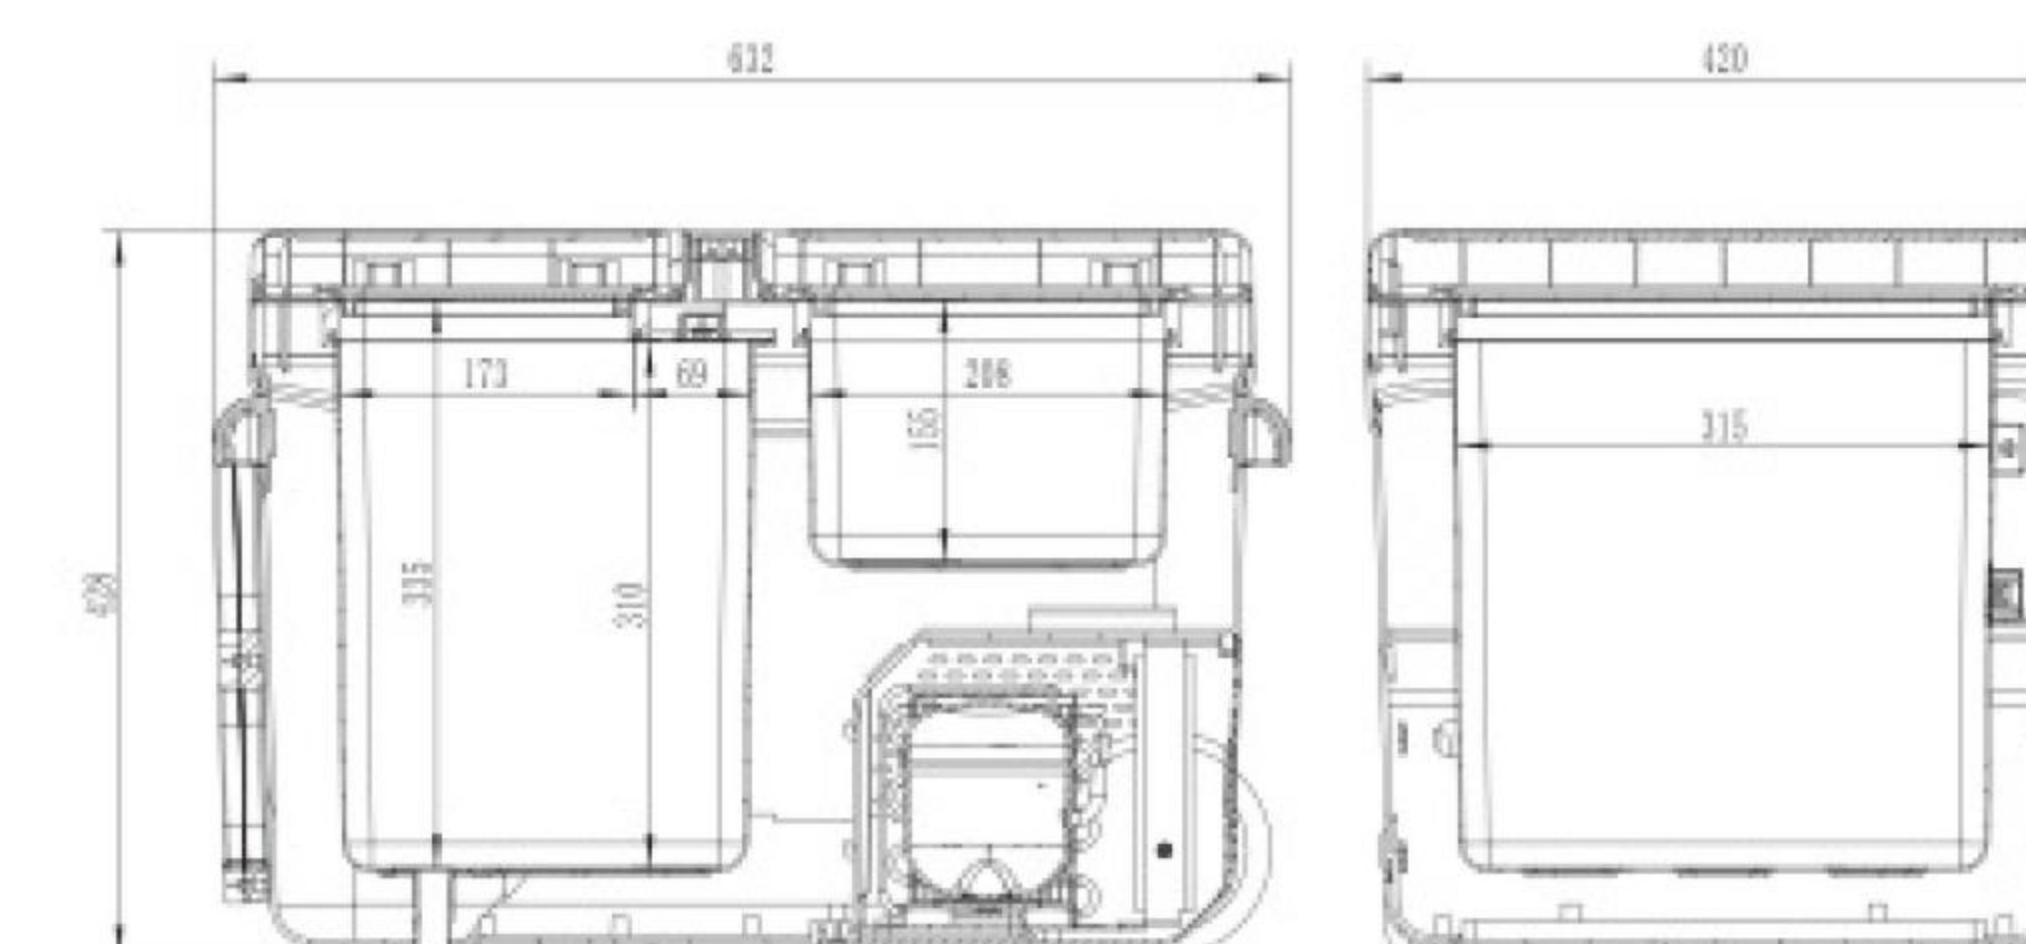

HF-02

- Capacity:45L
- Average power consumption:49W
- N.W.:17kg/ G.W.:19kg
- Dimensions:632*420*508mm
- Packing: 665*475*580mm
- FCL Quantity:144/288/288

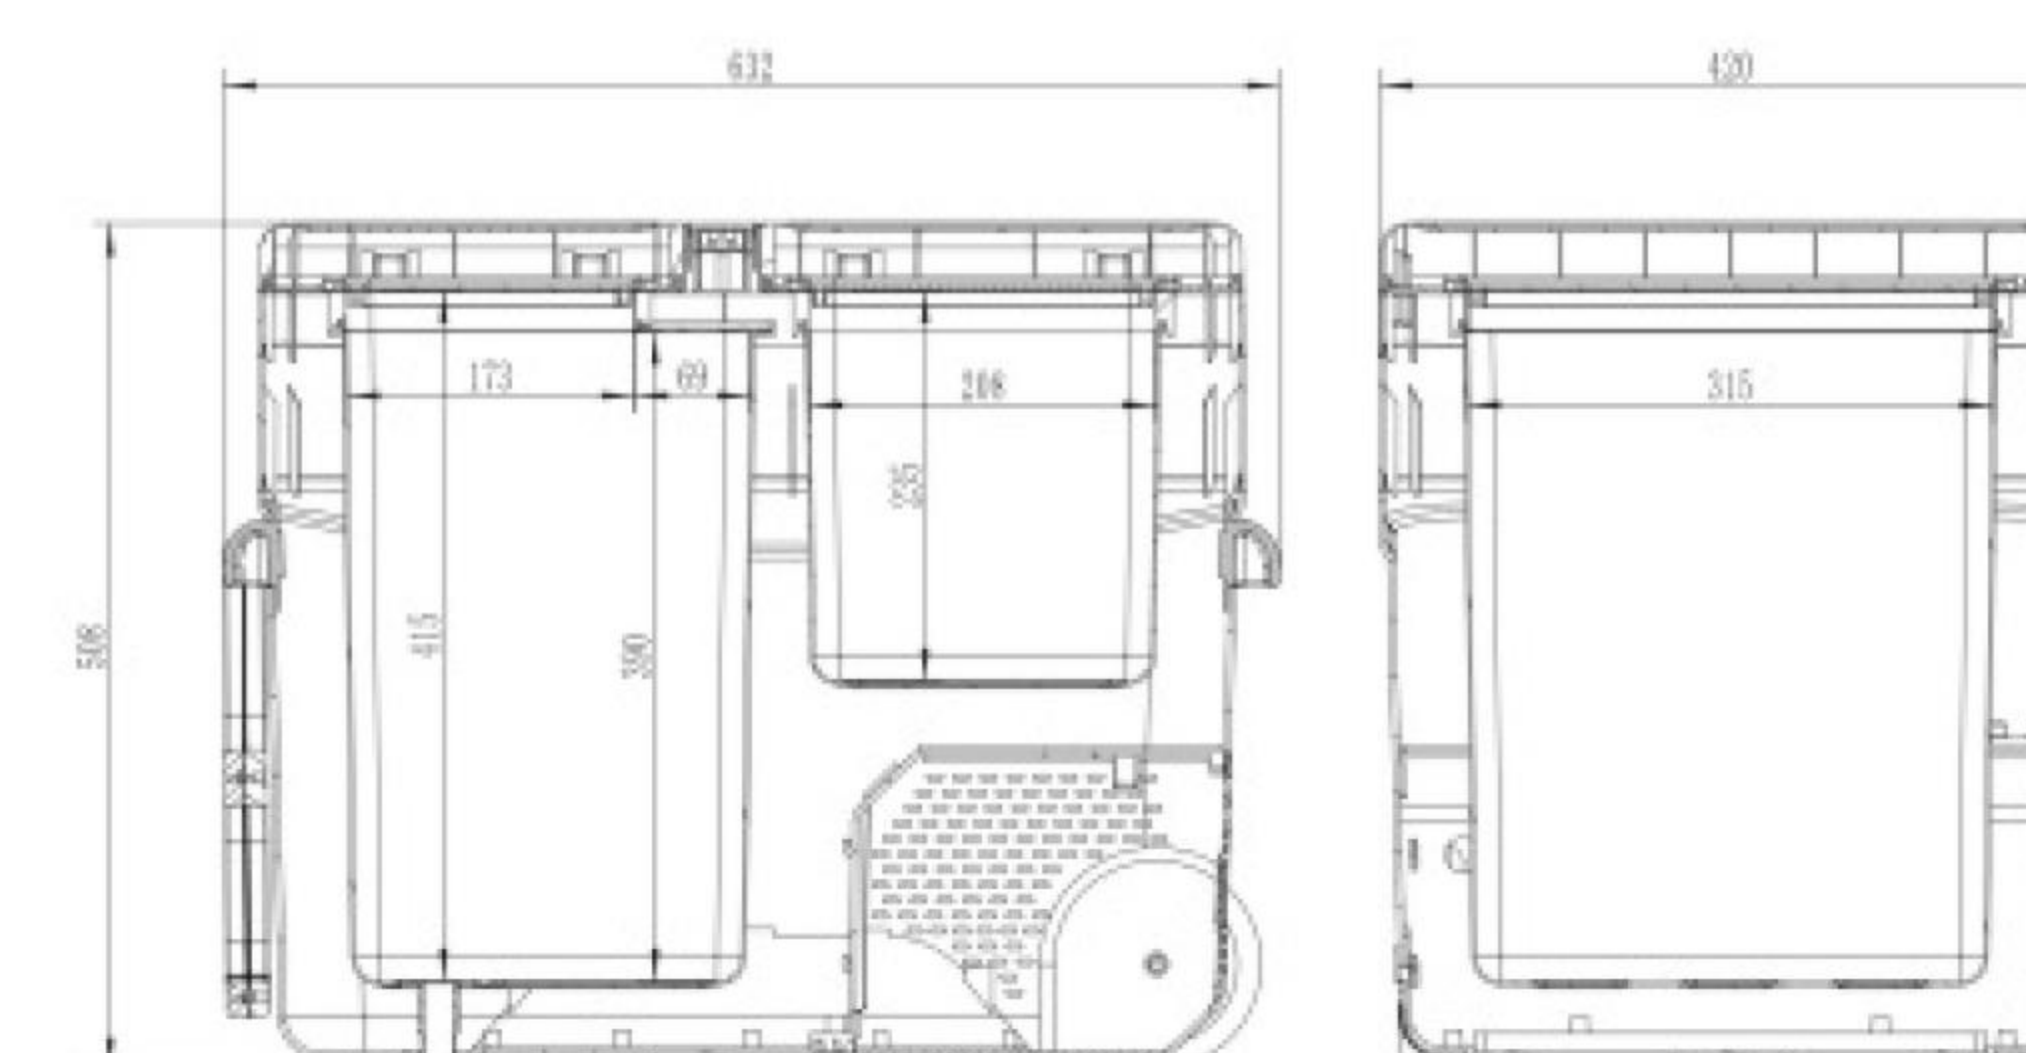



Low Voltage
Protection



ECO



Vehicle Battery

50W

10°C~
-20°C



BSCI



UK
CA



PAHS


LFGB

REACH



G-55

- Capacity:52L
- Average power consumption:50W
- N.W.:16kg/ G.W.:18kg
- Dimensions:726*420*485mm
- Packing: 750*500*560mm
- FCL Quantity:132/276/276

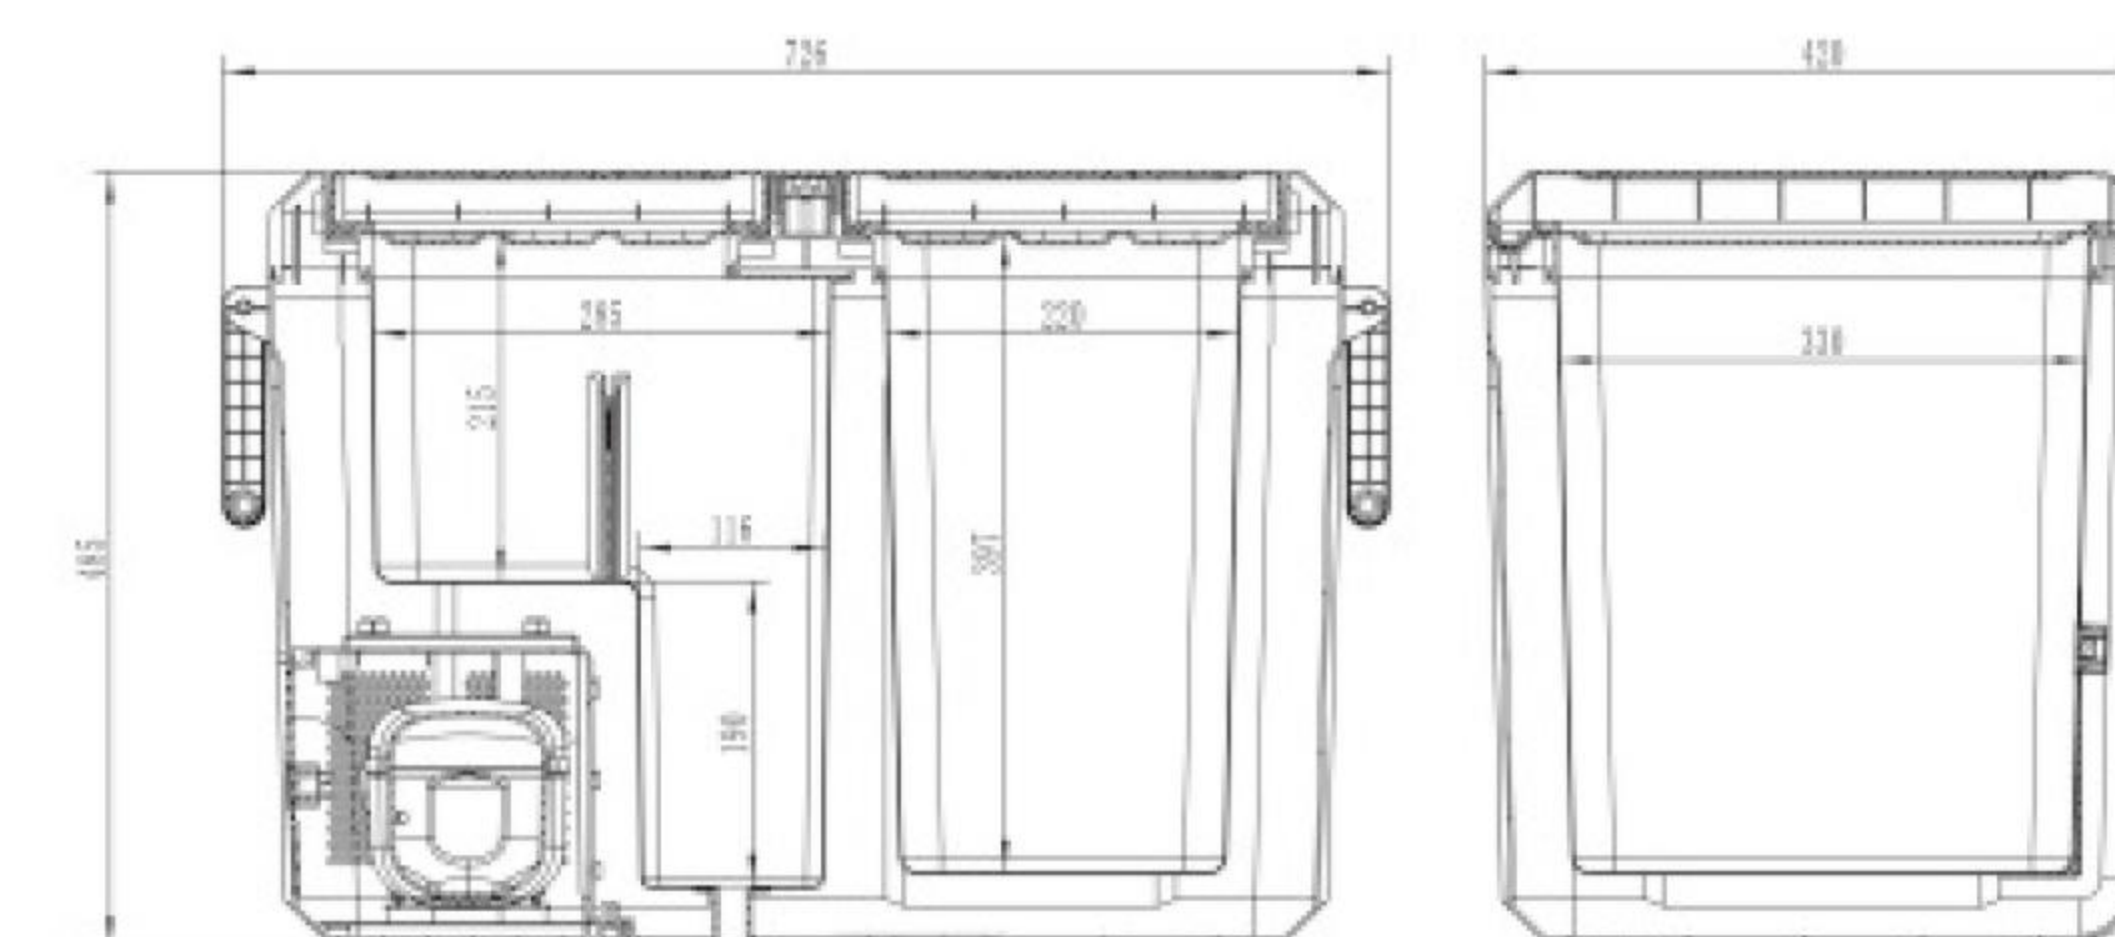

Low Voltage
Protection



ECO



Vehicle Battery

50W

10°C~
-20°C



BSCI



UK
CA



PAHS

LFGB

REACH

